
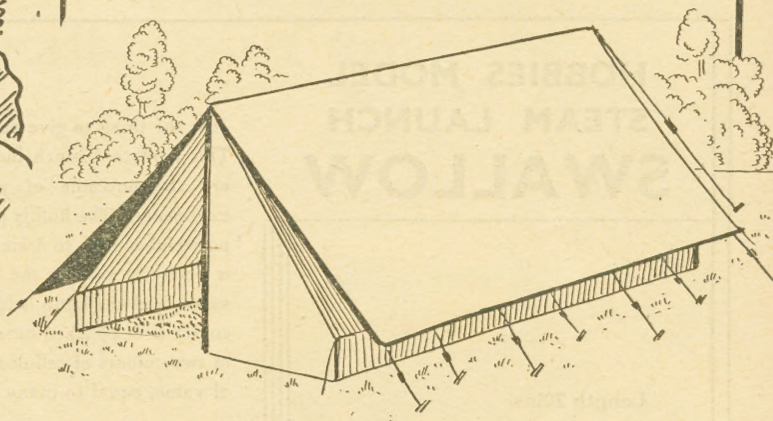


# Hobbies

## WEEKLY

A SEASIDE FLOAT  
A HOME MADE TENT  
MODEL AIRCRAFT  
PHOTOGRAPHY  
FRETWORK

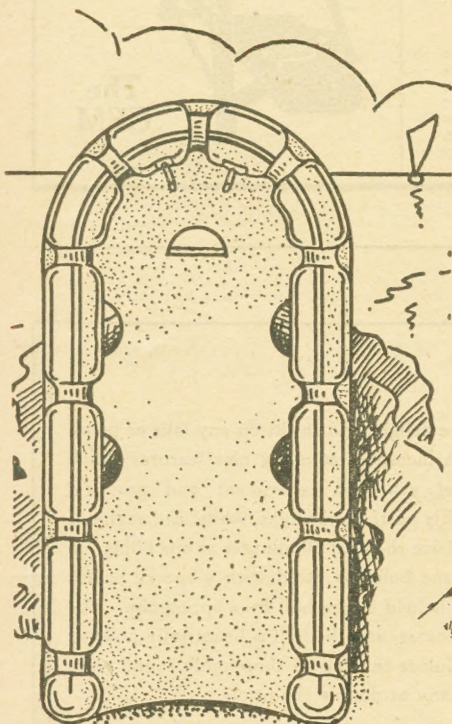

July 17th. 1937

2<sup>D</sup>


Vol. 84. No. 2178

THE FRETWORKER'S AND  
HOME CRAFTSMAN'S JOURNAL



# For 30/-


Did you ever see such a bargain? A woodwork treadle fretsaw for 30/-! Think of the things you can make and sell—of the profit such a machine will bring. There is nothing cheap or shoddy about it. It will stand up to any amount of cutting. Suitable for wood up to  $\frac{1}{2}$  in. thick, composition, sheet metals, etc. Speedy, silent, swift. Sent carriage forward in a crate ready to use.

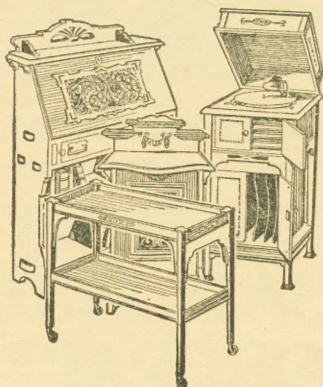

*Free list of fuller details on request.*

You can try one for yourself at the Hobbies Branches in London, Glasgow, Manchester, Birmingham, Leeds, Sheffield, Southampton, Hull. Or further particulars from the makers—Hobbies Limited, Dereham, Norfolk.

## A Factory at home!

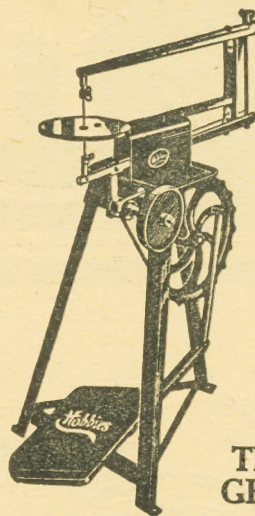


**The GEM**

## HOBBIES MODEL STEAM LAUNCH SWALLOW

Length 20ins.  
Beam  $3\frac{1}{2}$ ins.

Just the thing to give delight and thrills on any lake or pond. This modern Launch incorporates many new features which are the outcome of years of experiment and practical experience. The hull is particularly light, whilst the engine is powerful enough to drive the boat 20 minutes at one filling. It is perfectly safe as the boiler is fitted with a special safety valve, and the lamp is held to the hull by a spring clip. The engine is of polished brass, and the hull is beautifully finished in two colours of cellulose enamel. A thoroughly sound piece of value, equal to many at double the price.

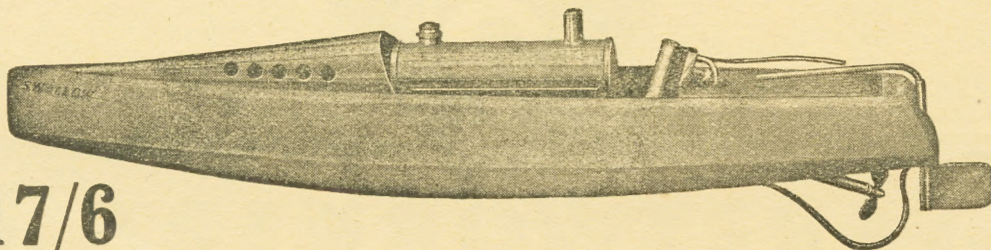

# 17/6

COMPLETE IN  
BOX WITH  
FULL DETAILS  
Postage 7d.

Obtainable from any good store or toy shop. Or from Hobbies own Branches in London, Glasgow, Birmingham, Leeds, Sheffield, Southampton or Hull.  
By post from Hobbies Ltd., Dereham, Norfolk.





# Hobbies

## WEEKLY



July 17th. 1937

Vol. 84. No. 2178

I AM so glad to find an increasing number of readers belong to the Hobbies League, because it shows enthusiasm and keenness. The joining fee is only 6d. and the only test is cutting quite a simple panel. This is shown in the booklet which not only tells you all about the League as well but provides the necessary Entry Form for you to fill up. If any reader who has not yet joined would like this free booklet I shall be happy to send him a copy.

IN this connection an interesting letter has come from S. A. Dickson a Belfast Leaguer who suggests that the Entry Test should not be sufficient! He says that should be the preliminary, and that a further and more difficult test should be available for those who care to undertake it. The ambitious worker, he says, wants to go a step further than he can at present. Quite right all to come in on the same basis, but surely, he suggests, fresh interest, and keenness would be provided by an additional step to be taken when the worker becomes able.

THIS is certainly a good suggestion, Dickson, but before going ahead I should like to have opinions of other readers. We could easily arrange to have an Advanced Panel to be cut from a small design supplied to those keen League Members who wanted to prove their ability. So now all you helpful friends in the League, write in and let me know what you think about it.

I HAVE heard of carving being done in many compositions and have seen examples in rock, metal, composition, wood, slate, stone, etc., but not until now, I think have I known of carving in coal. Anyhow, Stanley Skingle a miner who lives in the heart of the collieries near Chesterfield, undertakes some very nice specimens from "black

diamonds." Given a piece of hard coal, a penknife, file and other simple implements, he will fashion at leisure a sculptured head, a crucifix, an article of furniture in miniature, a ring, a medal, or almost any model that could be named. After seeing his work, the vicar of Barrow hill, has commissioned him to execute in coal a figure of Christ crucified for the Parish Church. The picture I saw was of a very nice head sculptured in coal, which certainly was a striking piece of work.

IT is always a source of delight to me to hear from my friends in India, because they are enormously enthusiastic in their work and must turn out hundreds of wonderful models. I wish it were possible to print all the photographs I receive but this would fill a complete issue very frequently. Now I hear of a Fretwork class for ladies being formed in Bombay. Mrs. B. Thulasi Bai, herself a gold and silver medal winner, is running a class where pupils are given expert and helpful advice, so they, too, may enjoy making up our designs. If any readers, in the district want to join they should ask Mrs. Bai for one of the interesting leaflets she has had printed. Her address is Varma House, 14th Road, Khar, Bombay, 21.

IT may seem some time since the Maze Competition closed last month and I had hoped to put the result in this issue. That unfortunately is now impossible but the

names of winners will definitely appear next week. I can tell you I was delighted with the number of entries.

THEN, too, you have been waiting patiently for the result of the Coronation Medal Stand Competition. This, too, has been judged and I hope to find room for some notes next week. So be sure to get your copy early on Wednesday.

The Editor

### CONTENTS

#### DESIGN—Wall Plaque

Hints and Tips	362
Beach Surf Board	363
Making a Door	364
Dwarf Sewing Stand	365
League Correspondence Club	366
Model Aircraft Topics	367
Replies of Interest	368
Speed Subjects in Photography	369
King and Queen Fretwork Plaque	372
Portable Garden Seat	375
Making a Tent	376
How to make a Duck Punt	377
Keeping a Calf	379
Fretwork Plaque	380
Wood Pictures in Relief	381
New Stamp Issues	383

#### Next Week's Design—Hall Rack

Correspondence should be addressed to: The Editor, Hobbies Weekly, Dereham, Norfolk, and a stamp enclosed with the Reply Coupon from Cover iii if a reply is required. Particulars of Subscription rates, Publishing, Advertising, etc. are on cover iii.



Send your own simple tips to The Editor, Hobbies Weekly, Dereham, Norfolk. Keep them short and add rough pencil sketches if possible.


# HINTS AND TIPS



For original Tips published the sender will receive a Hobbies Self-filling Fountain Pen. We cannot acknowledge or print all tips sent in.

## Galleon Models

I FIND that a simple way of making the steering wheel for model galleons, is to take a small cog wheel from a watch and cut




out every other tooth. This is then fixed to a small stump then glue the whole to the place in the deck.—(H.B.)

## Loose Valves

HERE is a tip which may be of use. If the base of a wireless valve should become loose it is often possible to refix it by immersing it in methylated spirits until the cement softens. The base and the glass are now pressed together and the cement allowed to harden.—(D. R. W.)

## Letter Box Alarm

HERE is an idea for notifying you when a letter or other correspondence has been put into the letter box. The two metal contacts shown in the drawing can be made of tin or brass.




When a letter is dropped into the box the two contacts touch thus causing the house bell to ring. This method is useful when the letter box is attached to a front gate situated far from the house.—(M.O.S.)

## To Soften Putty

BREAK the putty into small pieces, add equal parts linseed oil and water. Boil for ten minutes in an iron vessel then pour off the water and you have fresh soft putty.—(W.G.)

## Rattle Preventer

I HAVE found the following simple idea a very effective cure for rattling sash windows. Its advantage that, unlike rubber wedges, it is always in its place. Obtain from the ironmonger a "rim latch spring," cut this in half by rubbing on the door step, bore holes as shown, then slide

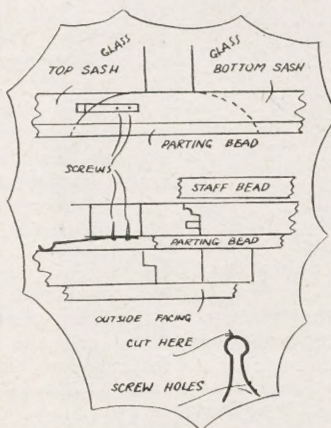


top sash down to bottom, lift bottom sash a few inches, and screw in place on bottom sash. One side treated as shown is usually a success but both sides could be treated if necessary.—(M.A.)

## Broken China

TO mend broken glass and china, melt common alum in an old iron spoon over the fire, then apply to the pieces of glass or china. When dry, these articles can be washed in hot water and the cement will not melt.—(A.F.H.)

## Camp Fireplace

PEOPLE who go out camping will find this gadget of great use. Get three long strap hinges such as can be bought for 2d. each.




Each hinge is bent outwards to form right angles and, then the three strips are held together by means of a flat bolt. This is arranged over the camp fire, the remaining tips are forced into the ground and you have a rigid support for holding on it such things as kettles and pans.—(C.H.)

## Puncture Indicator

WHEN mending a puncture put about two thimblefuls of powdered "blue" into tube and inflate. After a few seconds the spot around the puncture will go blue.—(H.E.C.)

## A Gluing Tip

A GOOD way to glue odd corners of your work, where a brush cannot be conveniently used for applying the glue is to



get an old tea-spoon and bend it to the shape shown in the drawing. This forms a holder which, when filled with glue, can be poured into any odd corner of the work.—(D.C.)



# A SIMPLE BEACH SURF BOARD

**W**HAT is a sea board? It is a water gadget combining and assimilating a small raft, swimming float and a light surf-board. The buoyancy of the model illustrated, however, depends on two inflated bicycle air tubes, and for such reason, it is recommended only to the younger readers of this paper.

We thought of using car air tubes, but the size, shape and difficulty of joining the severed ends does not make them feasible. In any case, they necessitate the use of a car pump to inflate properly, whereas the other requires a bicycle pump which can be borrowed more readily—or one could be reserved specially for use with the board.

## Mind Yourself!

It must not be imagined, of course, that the board is a thing one can sit on in an upright position. It is merely a helpful support for one's body while learning to swim or to "ride the white horses" and frolic about generally in the sea very near the shore.

We stress that because it should also be understood that this rather frail craft would not save a life if need be—you just can't depend on it to that extent. It is a plaything meant to create fun in a swimming pool or at the seaside at a safe distance from the beach, and if you are thus reasonably careful, you will enjoy yourself immensely—particularly on those incoming waves!

## Cutting the Board

The board itself consists of a piece of  $\frac{1}{4}$  in. birch plywood the size and shape shown at Fig. 2. Plywood is used in the commercial articles, and




Fig. 2—Size and shape of board

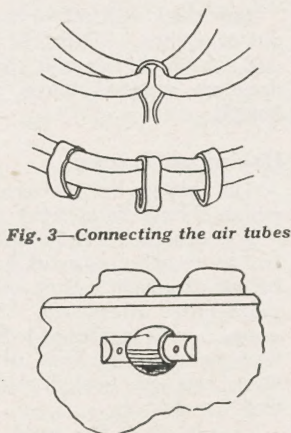


Fig. 3—Connecting the air tubes

Fig. 4—How to affix bands at the back

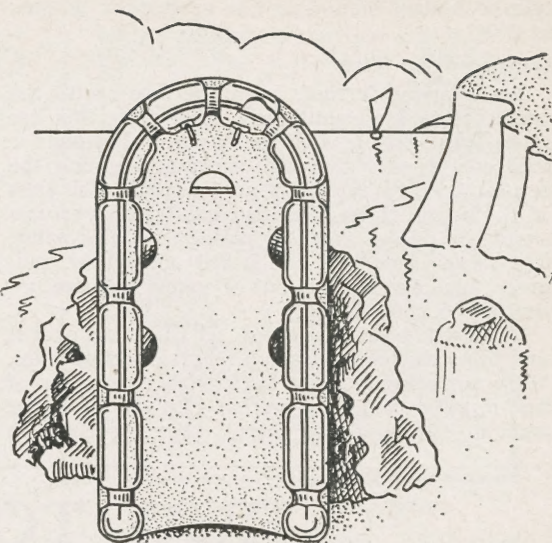


Fig. 1—The Completed Float

as a special precaution against dampness and warping, are coated with a preservative such as creosote and given two coats of enamel paint or a good cellulose paint.

Having marked and cut out the board as detailed (with a keyhole or scroll saw) bore the eleven strap holes required, using a 1 in. centre bit. You now need two bicycle inner tubes, the size being 28 ins. by 1 1/2 ins.

It is advisable to procure new tubes, same costing as low as 9 1/2 d. or 1/- each. You could use old ones, of course, but the patches give the finished board a somewhat home-made appearance, and as the tubes are "ballooned" (much more than as shown at Fig. 1), the patches tend to "drag" on the thin rubber and break away or tear the tubing or—if they *do* stick—cause a shapeless, bulbous mass.

## Affixing the Tubing

The tubes are affixed to the board in a manner that does not call for cutting and joining parts with solution. First of all, inflate the tubes sufficiently to alleviate flabbiness. Fold each in two to have the valve near the end of the fold as in Fig. 1.

You should have eleven strap bands handy to insert over the tubes to keep them folded. Incidentally, when folded, the full length should be about 39 ins. The bands for the "twin cylinders" can be cut from an old bicycle air tube, or better still, from a motor-bike tube which you could pick up cheaply from a local repair garage. A piece 12 ins. long would do, and this you might be given for nothing.

## The Bands

The bands are 1 in. wide and are easily snipped off with the scissors. Insert five and six on each folded tube at the approximate distances shown at Fig. 2, then connect the ends of both tubes (loosely) with a piece of sash cord, bringing the



odd or central band over the connection as seen at Fig. 3.

#### Completing the Work

Before going further, paint the board with the preservative aforementioned, then after this has quite dried, colour with the enamel, allowing the first coat to dry thoroughly prior to giving the second (and even a third) application. The ends of the board, strap holes and hand-grip apertures should be treated specially with fairly thick paint. The usual colours of the board are yellow, red, green, blue and mauve, but of course, you are not limited to these alone.

When the board has dried, set the tubes over it and bring the bands through their respective holes. They are affixed at the back with 2in. pieces of half-round moulding as seen at Fig. 4. Taper the ends of the moulding pieces, then fix them in

position with tiny *brass* screws long enough not to project through the reverse side of the plywood.

The board now remains to be blown up to its fullest extent and tested on water. After contact with salt water, always wipe the tubes dry and then deflate to less than the normal air pressure. Never leave the board on the sands with the tubes exposed to the sun. The heat only ruins the elasticity of the rubber, making minute cracks in the surface and causing a "blow" when you least expect it.

#### MATERIALS REQUIRED

- 1 piece birch plywood, 32ins. by 16ins. by  $\frac{1}{4}$ in. thick.
- 1 piece No. 35 moulding, 22ins. by  $\frac{1}{2}$ in. wide.
- 2 air tubes, 28ins. by  $1\frac{1}{2}$ ins.
- 1 piece band tubing, 12ins. long.
- 2 doz.  $\frac{1}{4}$ in. by 3 flathead brass screws.

## HOW TO MAKE A LEDGE AND BRACE DOOR

THE construction of a panelled door is often beyond the abilities of most amateur joiners, but a door of this kind is easily put together. It is composed of vertical matchboarding held together at the back by horizontal ledges, and prevented from sagging by oblique braces let into the ledges. The boards may be  $\frac{3}{4}$ in. or  $\frac{7}{8}$ in. thick; the ledges and braces should be of 1in. stuff, 6 or 7ins. wide.

Assuming the door to be 3ft wide and 6ft. 6ins. high, the boards should be 6ft. 7ins. or 6ft. 8ins. long. As many boards will be needed as will give a width of 3ft. when the groove of one outside board, and the tongue of the other have been removed.

Assemble the boards and square across them the positions of the ledges. The ledges look smarter and throw off water better if their edges are bevelled all round as shown in the drawing. The braces are bevelled on the edges only.

Each ledge is screwed at one end to one outside board. The boards are then cramped tightly together, and the ledges screwed at the other end. The door can then be turned over for the intermediate boards to be nailed to the ledges. The ends of the nails

should be clenched flush along the grain of the wood.

Now comes the making and fitting of the braces. To be effective, the braces must run in the correct direction, that is upwards, and away from the hinge edge of the door, so that they shall be in compression. Each end of a brace is square-ended part way across and then sloped off to the edge of the ledge.

To mark a brace, lay the board out of which it will be cut across two ledges, with its edges not less than 2ins. from their ends. Pencil marks are made on the brace over the edge of the ledges; and it then has the ends shaped and is cut out. The ledges are marked off from the brace, and notches cut in them. Care must be taken that these are not too deep, as the braces must be a tight fit.


Any slack will allow the door to settle and get out of square. When the braces have been placed and nailed on through the front, the ends of the door are squared across, and sawn to their final length.

#### Hinging and Painting

The hinges to be used are "cross garnets" which should be at least 15ins. long.

A door which is to be painted and will be exposed to the weather, should have all surfaces painted before assembling that will be inaccessible to the paint-brush afterwards; these include tongues and grooves, and insides of ledges and braces. White-lead paint is the best to use for the joints. If these are well sealed, water will not be able to find its way in.

Low doors of this kind, such as may be used for cupboards, need a ledge at the top and bottom only.

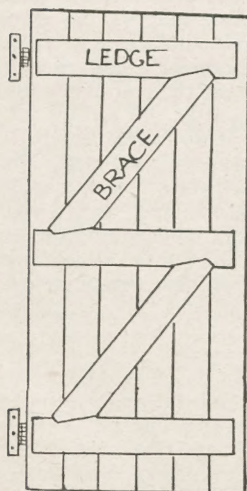



# A DWARF SEWING STAND

**A** DISTINCTIVE little piece of furniture, this Sewing Cabinet should be made up for every home where the ladies are handy with the needle.

In the cabinet pictured there is a large size space designed for holding needlework, while above this there is a sliding tray for reels of silk or cotton, needles, buttons, etc.

The construction has been greatly simplified by the use of double grooved moulding into which the sides may be glued direct, making a sound and easily made up box. The moulding is Hobbies No. 45, and four pieces will be cut off square measuring 17ins. long.

## The Box Panels

The main sides of the cabinet consist of  $\frac{3}{16}$ in. plywood, and there is some simple shaping to them. This is seen in Fig. 1 where the dimensions are given for drawing in the outline.

First cut four panels of the plywood 17ins. long by 12ins. wide, and see that all angles are square before setting out the curved line which will only be done on one piece. The curves on the other three can be got by drawing round the first cut-out side.

Brush some glue into the grooves of the moulding and drive in the sides, making quite sure the full depth of the grooves is occupied by the plywood.

## Sides and Floor

The sides are shown as A in the diagrams and pieces B, forming the supports for the floor, are next cut to length and glued and screwed on. Some screws may be put through from the outside as the heads can be hidden by the face strips O which are put on almost at the last.

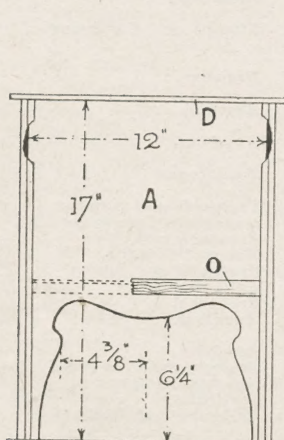


Fig. 1—Sectional view with dimensions


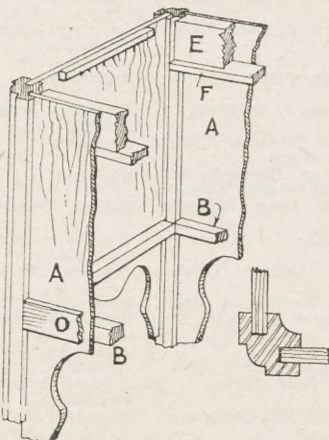


Fig. 2—A cut-away detail showing construction

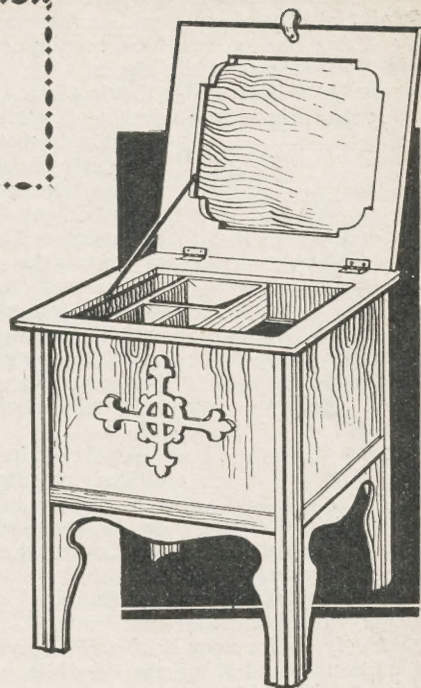

The floor supports are kept  $9\frac{1}{4}$ ins. down from the top edge of the box.

The floor (C) is  $12\frac{1}{4}$ ins. square and of  $\frac{3}{16}$ in. plywood. After cutting round the edges, each corner will need to be cut away to the shape of the moulding inside. Drop the floor in place and secure it to the supports with flat-head screws.

The top edges of the box will next be fitted with mitred fillets D. The lengths are checked direct from the box itself. Underneath these fillets on two sides only will be glued and screwed the two strengthening tray guides E. To the lower edges of these again will be fixed the tray runners F. The positions of these and pieces E are clearly shown in the diagrams Figs. 2 and 3.

It will be found that the top fillets D can be

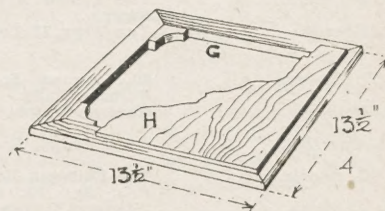


Fig. 4—How the lid is built




Fig. 5—Details of the tray



strengthened further by putting through some screws into the pieces E and on the other two sides by gluing one or two blocks underneath on the plywood sides as in the Fig. 2.

The lid is formed by mitring four pieces, G in the detail Fig. 4 and covering it with a panel of

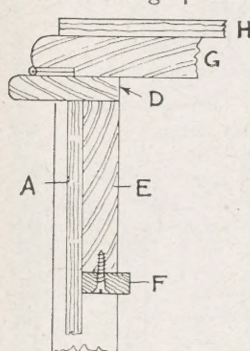


Fig. 3—A sectional view of lid and side

shows, completes the cabinet with the exception of the sliding tray.

The tray is shown complete in Fig. 5 and is made with  $\frac{1}{4}$  in. sides and ends, J and K respectively, and a floor N of  $\frac{3}{16}$  in. plywood. The partitions L and M are also of  $\frac{3}{16}$  in. plywood the top edges of which are glasspapered off. All the parts are cut to the lengths and widths given in the table and are assembled as shown in the figure.

Round off the sharp edges of the floor piece so it runs smoothly upon the runners (F) in the

cabinet. The wood suggested for this neat piece of furniture is oak, and it should be either stained dark and wax polished or stained a golden brown and varnished.

The accompanying table giving the lengths, widths and thicknesses of the various parts will be found useful and sufficient when making up the cabinet.

The decorative overlay on the front of the box should be cut from  $\frac{1}{16}$  in. wood and pinned on after the staining has been done, the face of the overlay being similarly finished afterwards.

A short piece of chain should be attached inside the lid and to the edging of the box to keep the lid at an angle as shown and to prevent the hinges becoming strained. A little loop of leather screwed to the lid will assist in the opening.

### CUTTING LIST

- A—4 pieces 17ins. by 12ins. by  $\frac{3}{16}$  in. plywood.
- B—4 pieces 11ins. by  $\frac{1}{2}$  in. by  $\frac{1}{2}$  in. stripwood.
- C—1 piece 12ins. by 12ins. by  $\frac{3}{16}$  in. plywood.
- D—4 pieces 14ins. by 12ins. by  $\frac{1}{2}$  in.
- E—2 pieces 11ins. by 12ins. by  $\frac{1}{2}$  in.
- F—2 pieces 11ins. by  $\frac{1}{2}$  in. by  $\frac{3}{16}$  in.
- G—4 pieces 13ins. by 2ins. by  $\frac{1}{2}$  in.
- H—1 piece 13ins. by 13ins. by  $\frac{3}{16}$  in.
- J—2 pieces 11ins. by 12ins. by  $\frac{1}{2}$  in.
- K—2 pieces 5ins. by 12ins. by  $\frac{1}{2}$  in.
- L—1 piece 5ins. by 12ins. by  $\frac{3}{16}$  in. plywood.
- M—1 piece 6ins. by 12ins. by  $\frac{3}{16}$  in. plywood.
- N—1 piece 11ins. by 6ins. by  $\frac{3}{16}$  in. plywood.
- O—4 pieces 12ins. by  $\frac{1}{2}$  in. by  $\frac{1}{2}$  in. plywood.
- 4 pieces of No. 45 grooved moulding, 18ins. long.
- 1 pair 1in. stout brass hinges.
- 1 piece of chain 12ins. long.
- Wood is not included for the front overlay.

## HOBBIES LEAGUE CORRESPONDENCE CLUB

These Members of Hobbies League would like to get in touch with other readers and so form pen friendships which will undoubtedly prove interesting to all. In this way, one has a wide circle of friends and increased knowledge in people and places, not only in one's own country, but all over the world. Members should write direct to the addresses given, stating their full address and age, adding any hobbies in which they are interested. Hundreds of members have already taken advantage of this Correspondence Club in this way and others who wish to do so should notify the Registrar with the necessary particulars.

NAME	ADDRESS	WANTS FRIENDS	INTERESTS, Etc.
K. Speed.	64, Allison Rd., Brislington, Bristol, 4.	Anywhere.	Stamps, Cig. Cards, Sport, Aeronautics.
A. F. Baker.	Public School, Nimmitobel, N.S.W., Australia.	Anywhere.	Stamp Exchanging.
G. B. Njaka.	The United Africa Co., Ltd., Onitsha, Nigeria.	Anywhere.	Anything.
R. Russell.	Two Ways, 12, Long Lane, Ashford, Middx.	Anywhere except Baltic Lands, Britain and America.	Stamps and Gardening
I. P. Basopia.	90, Jeewan St., Ramswami Quarter, Karachi, India.	Anywhere.	Drawing.
A. Hampton.	Governor's Rd., Onchan, I. O. Man.	Anywhere except British Isles.	Anything.
M. Obereha.	Govt. Lodge, Enugu, S. Nigeria, B.W.A.	Anywhere.	Anything.
J. C. Anozie.	The Enitonna Book Shop, Rarracks Rd., P.O. Box 30, Port Harcourt, Nigeria.	England.	Anything.
E. J. Smith.	"Corona," Sandbrook Lane, Moreton, Wirral, Cheshire.	British Empire.	Fretwork and Stamps. (especially Coronation).
O. Ryans.	11, Park Ave., Carcroft, Nr. Doncaster, Yorks.	Anywhere except Gt. Britain.	Fretwork and Stamp Collecting.
R. Allan.	101, Pumpherson Mid Calder, Midlothian, Scotland.	Jamaica or Africa.	Fretwork and Stamp Collecting.
L. Archer.	12, Alvecote Cotts, Nr. Tamworth, Staffs.	Australia.	Fretwork.
S. Rogers.	c/o P.M. Sitoo, Waterworks Inspector, Sitiwan, Malaya.	British Isles and anywhere else.	Anything.
F. J. Eames.	56, Crawley Rd., Luton, Beds.	Anywhere.	Anything.
Wong Chung Hon.	38, Killiney Rd., Singapore, S.S.	Anywhere.	Stamps and Postcards.
R. Thackray.	Worsall Rd., Yarm-on-Tees, Yorks.	British Colonies and Dominions.	Anything, Stamps in particular.
J. McKay.	19, Whitley St., Rochdale Rd., Collyhurst, Manchester.	Anywhere.	Fretwork and Birds.
P. Mangion H.	20, "A" Street, Paula, Malta.	Yugoslavia.	Science and Criminology.



## NOTES AND NEWS

# MODEL AIRCRAFT TOPICS

### Novelty and Speed

**T**HE speed contest held annually by the Society of Model Aeronautical Engineers can be relied upon to provide thrills, especially now that speeds are high enough to require new methods of timing. In previous years the two timekeepers have started their stop-watches when an observer on the starting-line signalled by flag that the model had crossed the line in full flight, and stopped them on receiving the signal from an observer on the finishing-line.

Last year Mr. H. E. White's low-wing racer 'Hornet' won the contest at no less than 42.61 miles an hour, which meant that it took but 3 seconds to cover the course of 150 feet. A delay of a fraction of a second in dropping the flag would, therefore, result in the loss of several miles an hour in the recorded speed of the model.

This year a stop-watch was fixed half-way down the course, started and stopped electrically by the observers on the starting and finishing lines, and recordings were much more accurate.

The flying of a speed model is certainly 'hit-or-miss' aviation, since one fast landing may put it out of action.

This year's winner, Mr. R. L. Rogers, made one flight only, which took his machine over the course at 46.48 miles an hour, a perfectly straight flight about 2 feet above the ground, but ending with a high-speed landing, ground-loop, and damaged tail-unit.

The winning machine was a distinct novelty, a

low-wing monoplane with twin fuselages, the idea being to overcome the terrific turning tendency of a single fast-running propeller.

Each fuselage contained five skeins of thick  $\frac{1}{4}$  in. rubber, giving 1 horse-power at 4,000 revolutions per minute of the propeller, and weighing in all 15 ozs. The total weight of the model was 75 ozs., and the loading of the  $1/6$  sq. ft. wing no less than 64 ozs. per sq. ft.!

Mr. White's 'Hornet' again competed, but was put out of action by a damaged wing-stub.

### A Promising Flying-Boat

**S**OME time ago mention was made in these notes of a large flying-boat designed and under construction by Mr. White. A model flying-boat is in itself something of a novelty, and in this instance there was the added novelty of twin rubber 'motors,' each contained in a small covered-in "nacelle"—like a small fuselage—mounted under the wing, with the propellers just clearing the hull of the machine.

This fine model, which has been named 'Ganda,' has recently made short hand-launched test flights, and exhibited a promising steadiness. It will be very interesting to see how it shapes when the time comes for trying rise-off-water flights.


### Wakefield Contest News

**N**EXT Sunday, July 18th, will be a red-letter day, as the British team for defending the Wakefield Cup will then be chosen by eliminating trials at Fairey's Great West Aerodrome, Heath Row, Middlesex. The contest itself will be at the same place on August 1st. Reliable news of the 1937 challengers is somewhat scarce.

Great Britain should have a stout champion in Mr. R. A. Copland, who secured third place in the 1936 contest at Detroit. His new 'shoulder-wing' model won the Wakefield Development contest in April, and showed excellent flying qualities.

Latest news at the time of writing was that the Americans are feverishly counting their dollars, and hoping they will be sufficient to pay their fares across the Atlantic!

New Zealand is sending six models to be flown by proxy, and South Africa is choosing two champions by eliminating trials. Last year over 120 models took part in the British trials.

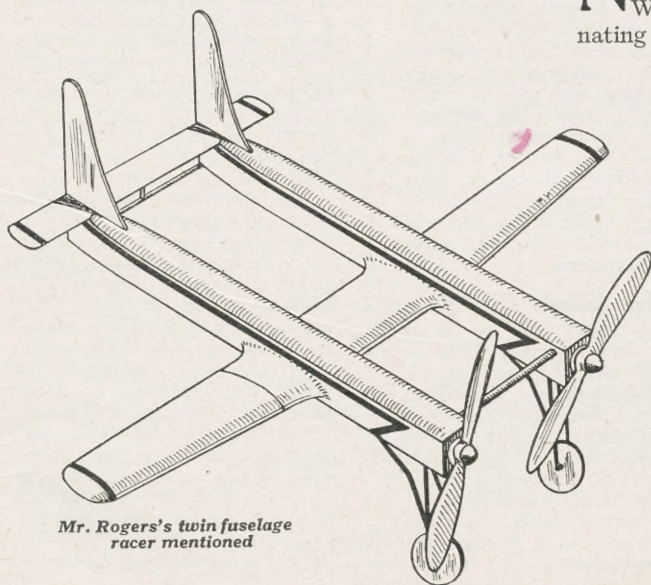


Mr. Rogers's twin fuselage  
racer mentioned





## REPLIES OF INTEREST

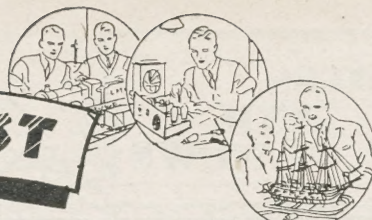

### Engine Rating

**H**OW is the H.P. of an internal combustion engine calculated? I understand that two engines can have the same cubic capacity, yet develop different H.P.—(W.P.B.)

**T**HE Automobile Association's formula for calculating the h.p. of an internal combustion engine is D squared, multiplied by N, and divided by 2.5—if the measurement is in inches, and by 1613 if the measurement is in millimetres. The same rule applies to both two stroke and four stroke engines. If there are two engines which according to that rule give the same h.p., but one has one cylinder and the other two, the latter will in actual practice be the more efficient. To ascertain the real h.p. of an engine, fit some kind of a pulley on the shaft, over which passes a cord or belt, hanging down on both sides. Connect one side to a spring balance, and the other to a weight, which is increased until the friction of the pulley on the cord just brings the balance back to zero. The actual h.p. will be found by multiplying the circumferential speed of the pulley by the weight attached, in pounds. If the speed is taken per second, divide by 550, and if per minute, by 33,000. The dividend is the actual h.p.

### Reports on Stamps

**H**OW and where could I get a stamp examined for genuineness and also valued for price? I can get no information on this anywhere.—(A.F.S.)

**Y**OU can get the stamp expertised by sending it to The Expert Committee of the Royal Philatelic Society of London. Probably a letter to the Secretary first would tell what you have to pay for this. The address is, Capt. L. J. Gilbert-Lodge, 41 Devonshire Place, W.1. As to the value, they may tell you this, but it is very doubtful. After all, value is only what one can expect to get for the stamp if sold, but in the case of high value stamps such as this, the difficulty would be to find a

purchaser, and the Committee possibly would hesitate to give an opinion.

### Removing Wallpaper Stains

**A**N accident at home caused some greasy furniture polish to be spilt on the wallpaper and, of course, there is a horrible stain. Could you advise me what to do for it?—(W.G.C.)

**I**T is practically impossible to get a stain out of ordinary wallpaper because usually it is too thin to be tampered with. You may try ironing the spot over with a sheet of blotting paper between the paper and the iron, but it is hardly likely to be successful. You may also try rubbing the spot over very gently with a piece of bread. The best thing to do is to secure a scrap of wallpaper the same as the original, and carefully cut out a piece to cover the offending spot. It will be more effective than anything else.

### Paint for Aquarium

**I**F I made an aquarium from a tin would it be alright to paint it inside with Crusoe enamel, or leave it without paint or anything?—(W.E.)

**I**F you do propose to make an aquarium from an old biscuit tin, by no means leave it without paint or anything as you query, for it would soon go rusty and rust quickly kills plant life and makes the water unfit for many creatures. Red lead or a water-proof dark green paint with enamelling over will do for a covering, but let it dry properly before you add water, and wash out before you use.

### Model Ship's Smoke

**W**ILL you tell me of a substance which when it burns will give off a dense smoke, and not much flame? I want to use it for a ship.—(R.D.R.)

**A** SUBSTANCE which gives off a dense black smoke is ordinary camphor. Experience with this shows that the only drawback is it burns away fairly rapidly. Another very good medium for producing smoke is tow. If some

short lengths of soft thick string are soaked for twelve hours in a saturate solution of potassium nitrate, dried thoroughly, then ignited and placed inside a ball of tow, clouds of smoke will emanate. You could experiment on these two systems, and should soon discover the most satisfactory way of producing a suitable amount of smoke for your particular purpose. It would be as well to pack the smoke-box of your model ship with tow in the middle of which you have placed a few lengths of the prepared string above referred to, and several balls of camphor, or, better still, powder the camphor and mix it with the tow.

### Oilskin Dressing

**M**Y work demands that I remain out in all weathers in oilskins. Can you tell me how to mix a good non-sticking dressing?—(P.D.)

**I** KNOW of nothing better than linseed oil as a dressing for oilskins, but there is a special preparation which is quite satisfactory, sold by J. D. Williams & Co., Dale St., Manchester, to whom you might apply if you wished.

### Oak Board Flooring

**I** PROPOSE taking up the present floor-boards and relaying with narrow oak planking or else parquet flooring.—(G.B.)

**I**F you have not had very much experience of this type of work, I would suggest your using narrow oak boards and not parquet flooring. There are several types of the former on the market. You will require tongued and grooved flooring if the old boards are taken up. The only thing to be careful about is to make sure that the joints are up nice and tight. This can be done by driving a screw-driver or a bar into the floor joist close to the nail, pulling it towards you and holding it in this position while the nail is driven in. If your existing floor is in reasonably good condition there is no need to take it up, but only to cover it with 2 by 3/4 tongued and grooved flooring. Any good book on carpentry and joinery will deal fully with this type of work.





## HOW TO GET "SPEED" SUBJECTS

**T**O judge by the snaps we see, it would appear that most amateurs like to try 'shots' at moving subjects while away on holidays—and at other times, too.

Motor-car trials, railway trains, high divers and shore games are among the most popular subjects.

The great trouble found in taking these things with an ordinary camera is that the shutter moves so slowly that the image on the film has had time to move a certain distance while the lens is open. Hence the final picture is 'fuzzy,' instead of being sharply defined.

To obviate this, cameras made specially for speed work have a shutter of the 'focal-plane' variety. This is capable of giving exposures of one thousandth of a second or less, during which time the movement of the image has been virtually nil and the result is a clear-cut picture.

### Some Examples

Under certain conditions, however, passably sharp snaps of speeding subjects can be obtained with slow shutters. Let us consider motor car racing first.

flashes on to the section of road a c, and as it rushes between these two points you *follow* it with the camera, i.e., keep the lens pointed at it.

This is not as hard to do as it may sound, and with a little practice it will be found no more difficult than keeping a finger pointed at any moving object.


The snap is taken by pressing the trigger while the camera is actually swinging between 'a' and 'c.'

If you have succeeded in 'following' the car fairly accurately, it will appear quite sharply defined in the print, but the background and spokes will be blurred, which gives a fine effect of speed.

The simplest way to get racing cars, however, is as they come *towards* you. A bridge crossing the road or track is ideal, as is a position on the far side of a corner.

A slow shutter-speed (say 1/50 or 1/100 second) can be used in these positions with virtually no blur.

These ideal positions cannot always be found, of

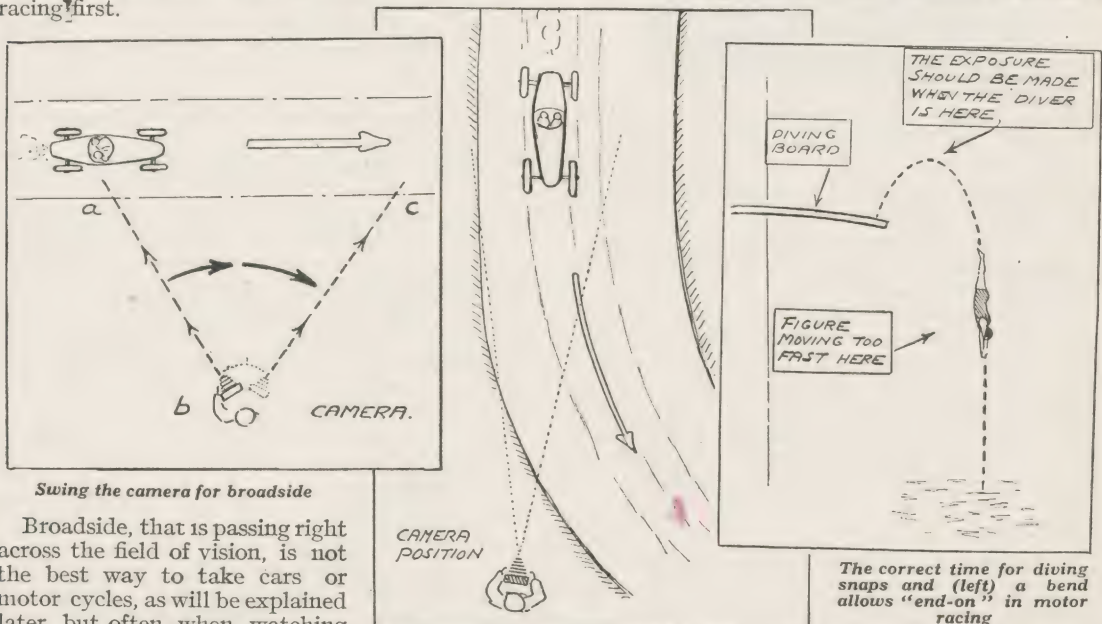

Swing the camera for broadside

Broadside, that is passing right across the field of vision, is not the best way to take cars or motor cycles, as will be explained later, but often when watching from a stand it is the only angle that can be got on them.

Quite sharp results can be obtained, however, from this position by a method known as "swing the camera."

The idea is that you sight the camera along a b that is, as much 'up' the road as possible from where you are standing. The car

course, but by keeping the angle between the line of sight and the path of the car small, satisfactory results can be got.

Small angles can generally be obtained by getting to the front of the spectators.

The reason why 'dead' front or small angled viewpoints give sharper pictures than other positions is that moving objects *appear* to move



slower, the nearer the 'end-on' position one stands. Indeed, they are actually moving at a much reduced speed relative to these good points of view.

Hence the movement of the image on the film is reduced, as well as the danger of blur.

All that we have said about motor cars and cycles is true for speeding trains, but with railways you have a distinct advantage, as overbridges can usually be found from which 'end-on' and 'small angled' shots can be made.



An "end-on" view with plenty of smoke for train pictures

With trains, however, it is a curious point that unless there is plenty of steam and smoke about, they often seem quite stationary. Cars never appear to give this impression—probably due to some suggestion carried by the line of spectators, goggled drivers, etc.

When taking trains, therefore, watch for days when steam and smoke are particularly obvious. This will be found the case when there is a certain amount of moisture in the air.

Railway trains have another advantage, inasmuch as they are *big*, which allows of them being photographed from a good distance away. This (as it will be explained), is a very good point.

### Diving Subjects

High divers make very popular speed subjects, but they are extremely difficult to get satisfactorily with a slow shutter. In fact, it is impossible to get them sharp when well into the vertical drop.

Most divers who work from a spring board, it will be found, are thrown a little distance upward before gravity starts to pull them downward. The time to 'snap' is when they are just at the top of the curve.

Whether the subjects be cars, trains, divers or, indeed, any moving object, it should be noted that

the further away one gets to take the picture, the less chance there is of it being blurred. Although, of course, the image will be smaller. If fairly sharp, however, it can be enlarged later.

Actually, twice the exposure can be given at a range of 100 feet as there can be at 50 feet, with no greater danger of blur appearing.

At all times use the very highest speed of which the camera is capable, and load with fast films to reduce any tendency to under-exposure that the quick snap might give.

When not trying any such scheme as 'swinging the camera,' hold it, if possible, against something firm while moving the trigger, as this will prevent 'camera shake' appearing. 'Swinging' is a case by itself, for here we are virtually making use of 'camera shake' to follow the subject and so are putting what otherwise would be a fault, to use.


### Wait for the Pause

In shore and other games like tennis where movements are irregular and in all directions, the best thing is to get well back and get a passable degree of sharpness by virtue of the long range, having big prints made later.

Also it is good to watch and wait for the comparatively still moments. They will be found in all games. As for instance, the moment when everyone is waiting for the next 'pitch' in rounders, or while the batsman waits tensely for the on-coming ball in cricket.

Above all the getting of speed pictures needs a certain amount of patience and practice, but they well repay the effort put into their getting.

## OUR PHOTOGRAPHIC PICTURE FEATURE

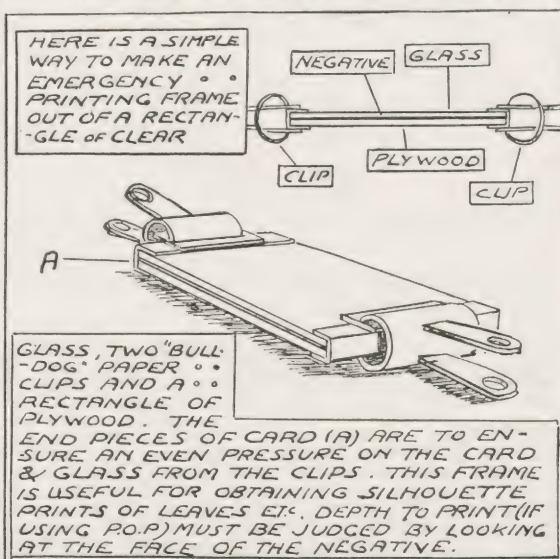





## Johnson's Photo Printing Box

This will enable you to make successful Bromide and Gaslight prints in your home without a darkroom and without any inconvenience.

Printing, Developing and Fixing on the same table without moving. Ample flex for plugging into wall or pendant plug. 2-way switch for alternating orange and white light. Fitted to take the usual 40-watt white light. Orange bulb provided.


A great boon to all Amateurs with limited accommodation.

Price 21/- of every dealer or post free.

Hobbies  
Dept.

**Johnson & Sons** HENDON  
Manufacturing Chemists Ltd. LONDON, N.W.4

## Get this HOME Painting Outfit

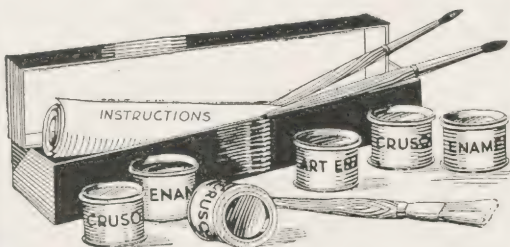

Every handyman needs this Outfit. With it you can paint on wood, glass, leather, pottery, etc. —a delightful and profitable hobby. Complete with 6 tins of enamel, 3 brushes, and instructions as shown.

**1/9**  
Post 3d.

**HOBBIES LIMITED, DEREHAM**

## UP TO 2 YEARS TO PAY FOR YOUR STILL OR CINE CAMERA

The few selections below give an idea how easy it is to obtain your choice from our huge range on these new terms.

### CINE KODAK '8'

For 9/- DOWN  
and 23 more similar monthly payments.

With fixed-focus f/3.5. lens exposure guide, footage indicator and eye-level finders. Holds 25 ft. of special film, only half the width of which is exposed at a time.

Cash Price £10

The first payment entitles you to start using your camera.




### AFGAR 'SPEEDEX'

For 8/10 DOWN  
and 14 more similar monthly payments.

3½ x 2½ roll film camera. Fitted with f/4.5 lens and Compur shutter, direct vision and reflecting view-finders.

Cash Price £6 6 0

Latest Lists, Post Free



## CITY SALE

AND EXCHANGE (1929) LTD.  
59/60 CHEAPSIDE, LONDON, E.C.2

## — Photographers —

*Develop 5 negatives  
for one penny with*

TRADE MARK 'TABLOID' BRAND

TRADE MARK 'RYTOL' MARK

Universal

Developer

1/9 PER CARTON All Photographic Dealers



BURROUGHS WELLCOME & CO.  
SNOW HILL BUILDINGS, LONDON, E.C.1

REGD TRADE MARK


## WOODWORKERS! Get this all-steel Marking Gauge

Every worker in wood needs this tool. All-steel construction..... no wood to warp or shrink. An accurate tool always. Indispensable for marking out position of mortises, etc.

ONLY


**1/6**

Post 3d.

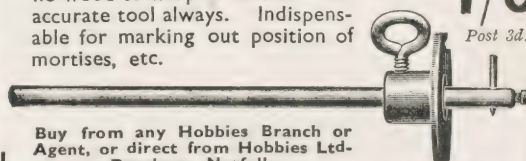

Buy from any Hobbies Branch or Agent, or direct from Hobbies Ltd. Dereham, Norfolk.



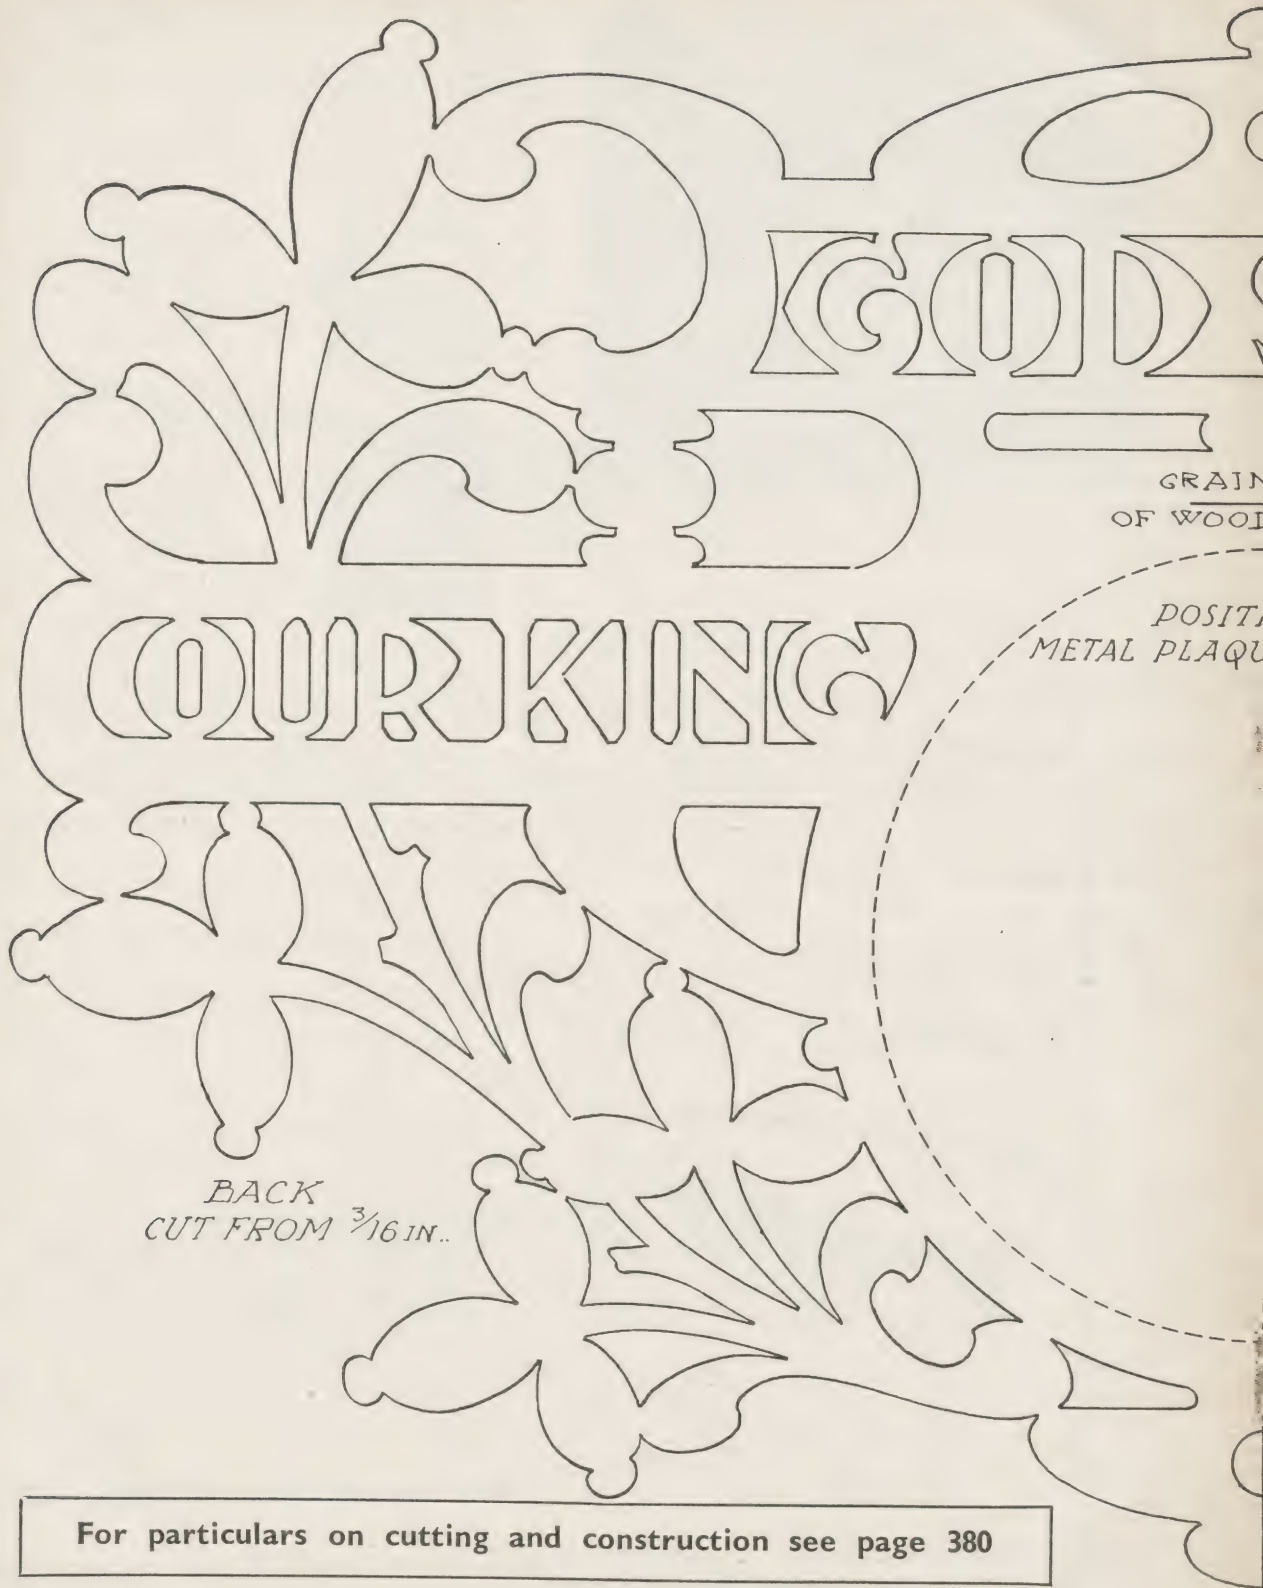

BACK  
CUT FROM  $\frac{3}{16}$  IN..

GRAIN  
OF WOOD

POSITION  
OF METAL PLAQUE

For particulars on cutting and construction see page 380



SAVE

ION OF  
E No. 5416.

AND QUEEN



# An Expert Designed It...

3ft. 10in.  
Wing Span  
14in. "Prop"



Hobbies Ltd., Dereham,  
Norfolk and Branches

You will be thrilled at the wonderful performance of this splendid model. An expert designed it. From tip to tip of its 3ft. 10ins. wing span it reflects the touch of a master hand. Remember, this is no midget.....but a model you will be proud to fly anywhere. The kit of parts costs only 19/6 and is really cheap at the price. Start building it NOW!


## Build it from this Kit

The Kit includes 14in. Airscrew, balsa, spruce, birch, gears, piano wire, 1½yds. Jap Silk, "Durofix," 20yds. strip rubber, etc. and costs only 19/6; postage 6d. The design chart and instructions cost a further 6d.

## A Flying Model

# LOW-WING MONOPLANE

## This is the Tool You Need for cutting Mitres !

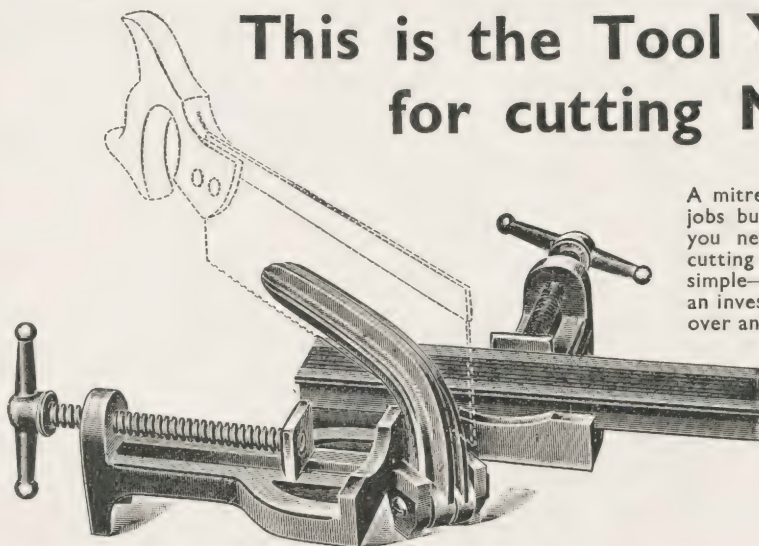

A mitre block is all right for some jobs but to ensure a perfect mitre you need this combination mitre-cutting tool and corner cramp. So simple—nothing to go wrong. It is an investment that will pay for itself over and over again.

## IN TWO SIZES

**No. 1** Takes mouldings up to 4½ins. wide. A wooden bed prevents damage to saw teeth. The saw guide is 7ins. long.

Price 10/6; postage 9d.

No need to "shoot" the mitres with this tool. You can join up straight from the saw-cut! Swing the saw guide out of the way (it is hinged for the purpose) and you have a first-class corner cramp.

**HOBBIES LTD. - DEREHAM, NORFOLK**

**No. 2** As Illustrated. For mouldings up to 5½ins. wide. Extra-long saw guide. Massive construction throughout.

Price 17/6; postage 1/-





# PORTABLE GARDEN SEAT

A USEFUL seat for the garden is always welcome and here is one of strong and neat design. It has the additional advantage of portability as by withdrawing a few bolts it can be taken apart and stored away for the winter.

The best garden seats are made of teak or oak, but as these woods may be too expensive a good quality red deal can be used. Red deal is quite good stuff for outdoor woodwork, and if kept painted will last for years.

First make the ends shown in Fig. 1. Here the main dimensions are given while the sizes of all timbers used will be found in the cutting list, allowance being made for the tenons.

The seat rail is of extra thick substance,  $1\frac{1}{2}$  ins. in fact, so that when tenoned into the legs its inner face will be flush, as in Fig. 5. This is to allow the seat frame to be bolted to as shown.

## Lower Rails

The lower end rails are tenoned into the legs, the arm rests are tenoned into the back while the fore parts are mortised underneath to fit a stub tenon (see Fig. 3) cut in the front legs. Glue and cramp up and drive 2 in. wire nails through

legs and tenons to lock them. If the nail heads are objected to, file off and punch below the surface, the holes being subsequently stopped.

The end bars of the seat frame are cut 1 in. shorter than the full width of the ends and when bolted to them will be  $\frac{1}{2}$  in. in back and front (see Fig. 5). Place them against the seat rail, cramp together, and drill two  $\frac{1}{4}$  in. holes right through for the fixing bolts.

Now take apart and make up the seat frame by joining the ends to the long sides with corner joints shown in Fig. 4. This joint should be pinned by a long wire nail driven through the top.

Glue and screw in each inside corner a small angle block and across the centre notch in a cross bar to support the seat midway.

## Angle Brackets

The angle brackets beneath the seat frame are cut  $8\frac{1}{4}$  ins. by 3 ins. and shaped up. The show part of the brackets is 6 ins. by 3 ins., the remainder being for the tenon which goes right through the legs. These brackets are best dowelled to the under edge of the seat frame first, then the tenons can be marked out and cut. By this means a more accurate joint can be assured.

Now the mortises for the tenons can be cut in the legs and the seat frame bolted to the ends. Brackets, by the way, are also fixed beneath the rear of the frame as well as the front.

A  $3/16$  in. hole is drilled through the legs and tenons, and a split pin tapped in to lock the joint.

(Continued at foot of next page)

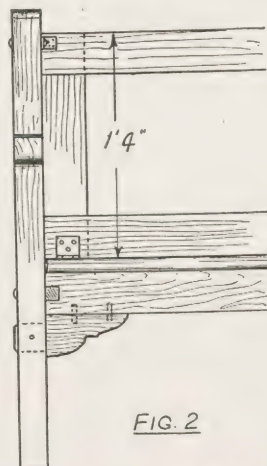
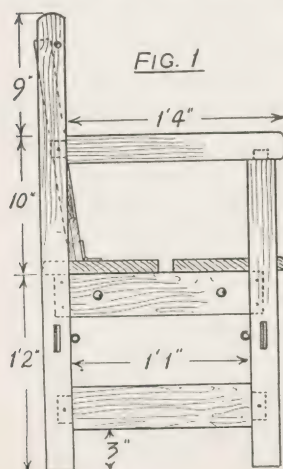


FIG. 3




FIG. 4




FIG. 5





FIG. 6



# MAKING A SMALL TENT

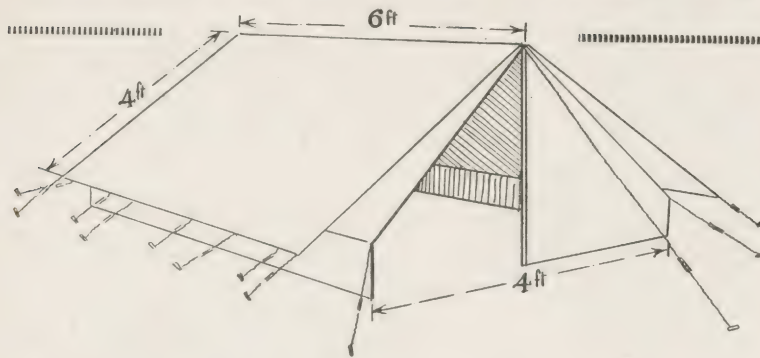

A SMALL tent adds to the enjoyment of many pastimes. To the garden it is an added attraction where tea may be served; to the hiker, cyclist, motor cyclist or motor tourist it is an addition to the outfit which gives pleasure apart from its practical value.

Here are the dimensions for making one of useful size. It can, of course, be made smaller or larger in proportion and according to your requirements.

## Material Needed

Egyptian cotton is the best material to use, because apart from the fact that it is inexpensive, it is light, strong, and can be closely packed. The tent in the drawing is 6ft. long, 4ft. wide, and 3ft. 9ins. high with an outer and inner fly.

You will need 18 yards of material, 41ins. wide; two poles 1½ins. in diameter; 24 galvanised meat skewers, and a ball of good strong string.

Make the outer fly by cutting two pieces of the material each 8ft. long and from one of these, cut a strip 18ins. wide. Put this aside. You now have left two lengths of 8ft., one of which is 41ins. wide, and the other 31ins. wide. Sew these together, making one sheet 8ft. long, and 6ft. wide.

Now 4ft. from the end of this, and as close to the edge as possible, make a small hole. Repeat this operation from the opposite edge. The poles

are to go through these holes, so strengthen them by letting two small rings into the material, so as to prevent tearing.

To complete the outer fly it is a good plan to strengthen it along the top and edges with a 2in. strip of material taken from the piece put aside. Sew in some more brass rings—one at each corner, and others at intervals

of say, 18ins. Now the outer fly is finished.

Make the inner fly the same way, except that two 9ft. lengths instead of 8ft. ones are cut off to commence with. The holes are made 4ft. 6ins. from the ends, the length being 9 instead of 8ft. Also instead of strengthening the ends as before, you sew a strip of the material a foot from the ends, so that you have a flap to hang down round your tent.

## End Patterns

For the ends, make a paper pattern first. Sew the pieces to the ends of the inner fly—two at the back and two at the front of the tent—sew the rear pieces together, but not the front ones, as they form the entrance, and are closed by tapes fixed in position.

Your poles should have a stout nail with a good head at one end. The holes of the inner and outer fly go over these, and also the string with which you stretch the tent taut from back to front.

The meat skewers make good tent pegs because they fix easily in hard or soft ground. Open the ends to form a hook instead of loops, thus allowing the looped cords to be slipped on and off.

Your string should be strong. Cut it into fourteen lengths of 1½ feet, and two of 4½ feet. Attach them to the rings in the inner and outer flies, and loop the other ends to slip over the hooks in the ground.

## Garden Seat—(Continued from previous page)

The exposed ends of the tenons are chiselled to wedge shape to look neat.

Two boards are required for the seat. These are cut out at the corners to fit round the legs, back and front, and are spaced 1in. apart. They are nailed or screwed to the seat frame only.

The back rest consists of two rails, halved as in Fig. 6 to vertical bars at each end and in the middle. The lower rail is bevelled off on its under edges to allow to rest to swing back to a restful slope, it is then hinged to the seat with 2in. back flap hinges, the hinges being screwed on a line 2ins. from the back edge of the seat. It is secured to the ends at the top with a bolt each side, the bolt passing through iron brackets screwed to the back.

This completes the seat which can now be

painted two coats of white or green paint as preferred. To take apart, remove the bolts and split pins, pull the ends away and fold the back.

## CUTTING LIST

	No.	Length.	Width.	Thickness.
<b>Ends—</b>				
Rear legs ...	2	2ft. 9ins.	2ins.	2ins.
Front legs ...	2	1ft. 11ins.	2ins.	2ins.
Arm rests ...	2	1ft. 5ins.	2ins.	2ins.
Seat rails ...	2	1ft. 3ins.	3ins.	1½ins.
Lower rails ...	2	1ft. 3ins.	3ins.	1in.
<b>Seat frame—</b>				
Ends ...	2	1ft. 4ins.	3ins.	1in.
Long sides ...	2	4ft. 6ins.	3ins.	1in.
Mid rail ...	1	1ft. 2½ins.	2ins.	1in.
<b>Back rest—</b>				
Rails ...	2	4ft. 6ins.	3ins.	1½ins.
Vertical bars ...	3	1ft. 4ins.	3ins.	1in.
Seat boards ...	2	4ft. 10ins.	8½ins.	1in.
Under brackets ...	4	8½ins.	3ins.	1in.



# HOW TO MAKE A DUCK PUNT

**F**OR those fond of the sport of duck shooting, a duck punt is almost a necessity. Apart from the specific purpose for which the punt is designed, it is invaluable for boating in shallow waters or for such uses as a punt is usually put to.

It should readily appeal to the amateur in boat construction on account of its simplicity, as any fellow reasonably handy with wood-working tools can hope to make a satisfactory craft.

Now study the drawings to get a clear idea of the general construction. Fig. 1 shows a side view with a portion of one side of the punt cut away to reveal the bulkheads, etc. Fig. 2 is a plan of the framework and Fig. 3 a section through the cockpit.

Make a start with the bulkheads, A and B. These are rectangular frames of red deal, halved together and screwed at the corners. The bottom rails are 1 in. by 1½ in. stuff; sides, 1 in. by 2 ins., and tops, 1 in. by 3½ ins. When glued up, cut the tops to a curve, reducing the height of the sides to 1 ins., also curve the under edge of the top rails to suit, as in Fig. 4.

## Chines and Gunwales

At the corners cut out the notches, a, b, c, and d. These measure 1 in. by ¾ in. and are to admit the chines and gunwale battens. No dimensions as to the width of the bulkheads are given in the drawings as they differ. Bulkhead A is 3 ft. ins. across and B, 2 ft. 10 ins. across.

From 1 in. by 1½ ins. wood, cut the side bars of the cockpit, C, 3 ft. 6¼ ins. long. These are notched ¾ in. into the bulkheads, connecting them together. They should be spaced to leave 2 ft. 5 ins. between them, as seen in Fig. 2. The joint should be glued and screwed.

The stem and stern posts are cut from 9½ in. lengths of 6 in. by 5 in. wood, preferably oak or elm. The shape of these is clearly shown in Fig. 5. The recesses either side are to receive the ends of the side planks of the punt and should be cut ½ in. deep.

The side planks are of larch, 1 ins. wide and ½ in. thick, free from knots. Cut each to a length of 13 ft. 9 ins. and trim the bottom edge to a curve so as to reduce the width to 9 ins. at each end.

Take the stem post in hand, coat the recesses generously with a thick white lead paint and screw one end of each

side plank therein with four 2 in. brass screws.

## Fixing the Bulkheads


Now place the bulkheads between the side planks, the foremost being 5 ft. 3 ins. from the stem, force the planks together and screw to the stern posts, luting the joint with the thick white lead paint. See the bulkheads are quite square across, then screw through the sides into them to fix.

The gunwale battens and chines are lengths of 1 in. by ¾ in. spruce. They are luted with paint and bent round the inside and there fastened with brass screws.

Turn the whole upside down and with a smoothing plane, set fine, trim off any excess portion of chine and bulkheads to make the bottom all smooth for the flooring to be nailed across.

Use ¾ in. T and G boards for the floor, lute the tongues and grooves with paint, also the bottom edges of the sides, etc., and nail the boards across with 2 in. copper nails to the sides and chines. A few brass screws can be added, especially where owing to the curve the boards may be a bit hard to bed close.

A tight joint is necessary else the boat will not be watertight. Turn the boat on its side and trim off the edge of the floor flush with the sides. Now cut the strips of wood for the runners. (See Fig. 3). These are ½ in. by 2 ins., and are spaced as shown. Just trim them to length and leave for awhile.

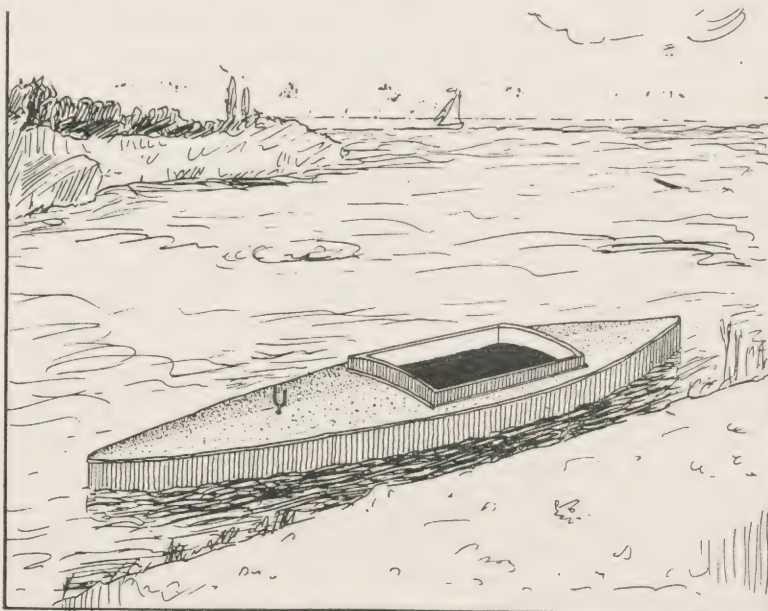



With the boat right side up, measure off and cut the central deck bars, D. These are 1in. by 2in. material. Notch these into the bulkheads and trim to fit over the stem and stern posts.

They should be slightly curved on their upper faces to conform with the curve of the bulkheads. They are supported about midway by struts E, of 2ins. sq. timber, screwed to the floor from beneath and through the bars.

Between the sides of the boat and cockpit bars, C, two brackets are fixed each side. The shape of these brackets is shown in Fig. 6, they are glued and screwed in place.

Fig. 6 also shows how the bars C and D are notched into the bulkheads. The whole of the interior should now receive two coats of white lead paint or boat varnish before the deck is fixed.

### Coaming

The coaming, which lines the opening of the cockpit, consists of two side pieces,  $3\frac{1}{2}$ ins. wide and front and back pieces, cut to the curve from  $5\frac{1}{2}$ ins. wide stuff, all  $\frac{1}{2}$ in. thick. They are nailed together at the corners and screwed to the bulkheads and bars, C.

A canvas deck is suggested, but to give it shape a foundation of three ply is first fixed across. A light grade of plywood, say  $\frac{3}{16}$ in. thick will do, and of a quality that will bend to the curve of the deck.

The fore and aft pieces are fitted to butt against the coaming and are copper nailed or screwed to the gunwale battens and sides of the boat. At the sides of the coaming a small strip of the

plywood,  $\frac{1}{2}$ in. wide, should be cut out to expose enough of the bulkheads to nail the side deck pieces to, as in Fig. 7. Then the narrow strips for the sides can be nailed across to complete.

The canvas, tarpaulin grade, is stuck to the plywood with waterproof glue and should butt

### CUTTING LIST

	No.	Length.	Width.	Thickness.
Sides	2	13ft. 9ins.	11ins.	$\frac{1}{2}$ in.
Stem and stern	2	9ins.	6ins.	$\frac{5}{8}$ ins.
Bulkhead Tops	1	3ft. 1in.	3ins.	$\frac{1}{2}$ in.
Bulkhead Tops	1	2ft. 10ins.	3ins.	$\frac{1}{2}$ in.
Sides	4	1ft. 1in.	2ins.	$\frac{1}{2}$ in.
Bottom	1	3ft. 1in.	1ins.	$\frac{1}{2}$ in.
Bottom	1	2ft. 10ins.	1ins.	$\frac{1}{2}$ in.
Rails C	2	3ft. 6ins.	1ins.	$\frac{1}{2}$ in.
Rails D	1	5ft. 0ins.	2ins.	$\frac{1}{2}$ in.
Rails D	1	4ft. 0ins.	2ins.	$\frac{1}{2}$ in.
Struts for same	2	11ins.	2ins.	2ins.
Gunwale battens and chines	4	13ft. 6ins.	1in.	$\frac{1}{2}$ in.
Coaming ends	2	2ft. 4ins.	5ins.	$\frac{1}{2}$ in.
Coaming sides	2	3ft. 6ins.	3ins.	$\frac{1}{2}$ in.
Incidentals.—Plywood for decks, one 3ft. 6ins. by 4ft. 6ins. and one 5ft. by 4ft.				
Flooring.—Approximately 80ft. run $\frac{3}{4}$ in. by $\frac{1}{2}$ ins. T and G board.				
Runners.—40ft. run $\frac{1}{2}$ in. by 2in. deal batten. 1in. half round moulding, 30ft. $\frac{3}{4}$ in. half round moulding 30ft., $\frac{1}{4}$ in. quarter round moulding, 12ft.				
Tarpaulin canvas.—48ins. wide, $3\frac{1}{2}$ yards.				




Fig. 1—Section giving dimensions and positions of parts

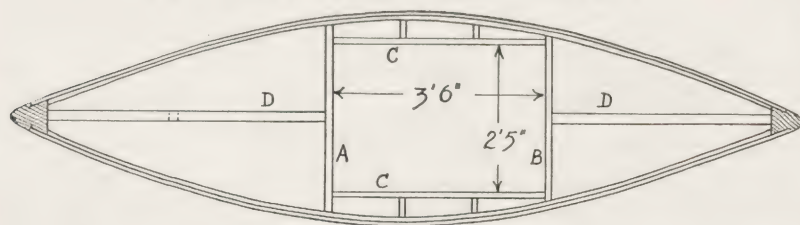


Fig. 2—Plan of the parts with deck opening




Fig. 3—A section showing amidships



Fig. 4—The curved top to the sides




Fig. 6—How the rails and bars are fitted




Fig. 5—Stem and stern posts




Fig. 8—Flooring edging




Fig. 7—Side deck fixing

against the coaming. The side strips should overlap 1in. on the fore and aft deck canvases, the overlap being doubled and tacked with copper tacks.

Press the canvas down to stick without creases, trim the edges to within  $\frac{1}{2}$ in. of the sides of the boat and there tack down.

Cover the tacked edges with a  $\frac{3}{4}$ in. half-round moulding, nailed along.

Round the four sides of the coaming nail a small quarter-round moulding in the angle formed between coaming and deck. Lute the moulding well with thick paint and fix with copper nails. It will cover the edges of the canvas.

Give the outer woodwork a good glasspapering and along the edges of the flooring fix a 1in. halfround moulding, coating it generously with the thick paint before nailing. This (Continued at foot of next page)





**Y**OU will find that a calf is a most fascinating pet to keep, and as soon as it grows up into a cow or bullock, and becomes too large for you, you can easily sell it at a good price, and rear another.

Feed your calf on as much milk as he or she will drink, if you want a really healthy animal. Allow the calves, however, only three meals a day. Remember that boiled skim milk given just warm is quite good for calf feeding, if whole milk proves too expensive. It must, however, be strained after it has cooled, in order to remove skin, though there is not usually as much of this on skimmed milk as on fresh full cream milk.

#### Meal and Milk

Calf meals are of many kinds, and most of them can be stirred into fresh milk, or into boiled skimmed milk to make it more nutritive for rapidly growing calves. You must study your calf, however, carefully for the first few days, and see whether it can stand these extra foods, and if not, continue with milk only for the time being.

Linseed meal makes an excellent jelly if treated with boiling water, and calves should have it in warm milk several times a week. They will enjoy it thoroughly, and will always be ready for your pail containing it, if you make a point of giving it to them for a particular meal, and on a particular day of the week.

#### Solid Foods

Calves like carrots, and should be allowed them either fresh, or better still boiled. The smaller carrots are much better for very young calves, and may well be chopped up, or at any rate sliced at first, as some calves find difficulty in masticating them, especially when they are not softened by boiling.

A mixture of boiled chopped hay and sliced boiled carrots suits older calves admirably, but look into their mouths first, and see that the teeth are capable of masticating this mixture, otherwise it may be greedily bolted, and when it is returned later to be chewed properly, the calf may not find itself able to do so.

Remember also that turnips, like carrots, are best boiled for calves, and a mixture of them boiled and sliced along with warm boiled hay is much appreciated in cold weather.

When your calf is six weeks old, and not before, provide a wisp of sweet hay for him or her to pull at. This is best suspended on a piece of strong cord from a wall peg near the roof.

Don't be afraid of allowing each of your calves a lump of chalk to lick—in the pen or stall whenever she or he wants to. This is much better than round chalk or powdered limestone dust, although you will be recommended by some farmers to use that, and to mix it with their food. The chalk neutralises acids which are responsible for a lot of indigestion.

#### Care of Calves

As regards the general care of calves as pets, remember that each calf should have a pen or stall of its own, and that this is best constructed in a rather narrow style, in order to discourage the animal from the undesirable habit of turning round and licking itself.

Various flooring materials have been proposed, but concrete makes the best sloping floor for calf pens, though plenty of straw must be put on it, otherwise the calves feel it cold, and also find it uncomfortably hard.

#### Cleanliness

Calf pens need to be cleaned, and indeed should be washed out every day, but do not throw a lot of water about, especially in damp weather, as the animals need to be kept as dry as possible if they are to thrive.

As an appetiser when the calf is off its food, try rubbing a bit of rock salt round the inside of its mouth. This is often extremely effective, and some farmers go as far as always to offer a lump of salt at the beginning of each major meal.

If you want your calf to get fat extra quickly, make a point of disturbing him or her as little as possible between meals, i.e. take your friends to inspect the animal at feeding time, and not at other periods of the day.

#### Duck Punt—(continued from opposite page)

moulding is shown in section, Fig. 8. Now give the outside and bottom a coat of priming colour, also the runners. When dry, apply thick paint to the runners and screw to the bottom of the boat.

The canvas deck should receive one or two coats of boiled linseed oil, to which a little driers has

been added, to make it waterproof. The final coating of white lead paint can be applied to finish.

A gun swivel, if required, is fixed at a convenient place on the deck. This article can be bought at a marine stores or sports dealer.



# SIMPLE FRETWORK PLAQUE

Patterns on pages 372 and 373

THE centre pages of this issue contain patterns for a straightforward piece of work which many of our readers will desire to make up in this Coronation year.

As can be seen from the illustration herewith, the plaque is intended for hanging on the wall and contains the words "God save our King and Queen," and has beneath a lifelike realistic plaque of Their Majesties.

The whole thing is cut from a single piece of 3/16in. wood and we can supply a board of very nicely grained suitable whitewood for 10d. The plaque which goes in the centre of the pattern is very nicely embossed in metal, and has a realistic picture of King George and Queen Elizabeth in profile.

If necessary, too, we can supply a piece of cloth for backing up the wording and the ornamentation, both being supplied for 1/6.

## Simple Cutting

The work of cutting is simple even to the beginner, but particular attention should be paid to the lettering. A good plan is to run a pencil line along the whole length of the top of the letters so that actually your saw may be cutting to this line. Thus they will all be quite straight and finish at the same point.

Nothing looks more odd than some of the letters being short, some long and the line above and below them ragged instead of straight.

Although the plaque is just over 12ins. long, it can be cut with a frame of that length by approaching the various frets from either end instead of perhaps all from one direction. The grain of the wood, of course, is from side to side.

## Points to Note

Notice that the flowing curves of the leaves issue from a centre point below the plaque, and be sure to get them to balance up correctly from each other. A good plan is to cut out one small interior fret on one side, then to cut out the same fret on the other side. As you do it, notice that it balances up with the first one cut.

Each interior fret, too, can have two or three



drill holes made in it to facilitate the turning of the saw. Here again make the drill holes first in one fret, then cut it out with the fretsaw and in doing it you will probably realise a better position where drill holes can be made.

Cut straight across to the similar fret on the other side of the pattern, and put the drill hole to the best advantage. This, by the way, is usually the widest point of an angle. In this way the sawblade can go down one side of the angle to the point, then be backed up into the drill hole, turned and taken down the opposite side.

There is, by the way, a very helpful chapter on this particular point in the fretwork book "The Art of Fretwork," and those who have not had a copy should certainly get one because it is full of useful information on many of those small points which take a long time to pick up if you have to find them out for yourself.

## Finishing Touches

When the cutting has been completed, scrape off all the paper remains with a coarse grade of glasspaper, finish up with a finer grade and be sure not to scratch the surface of the wood. Be sure, also, to use the glasspaper on a block of wood, or in a proper holder, and keep a flat even surface and pressure.

Finally, look over the whole design to see that there are no faulty sawcuts or indentations made. If so, wipe them out as much as possible with those tiny fretsaw files which will go into any angle or curve.

The metal plaque in the centre can be fitted either by gluing it in place, or by fixing with a couple of tiny fret pins. If fixing with glue, put a fairly thick coat of the adhesive over the whole of the back, and press very firmly in position on the wood. Hold it there under pressure until the glue has set, but do not weight it down too heavily or the embossed portion will get flattened out.

It is a good plan, too, to scratch the actual surface of the wood fairly deeply so the glue gets a better grip. In fixing it by fretnails or tiny pins, be sure first to drill holes. Use a very fine fretwork

(Continued at foot of next page)

## MATERIAL SUPPLIED

For this design we supply a parcel of whitewood for 10d. (post free 1/1).

The embossed plaque of King George and Queen Elizabeth and sufficient linen cloth for backing cost 1/6 post free.

A complete parcel wood and fittings 2/3 post free.



# WOOD PICTURES IN RELIEF

THESE pictures in relief make charming decorations for the home, and they are also useful for advertising and general demonstration purposes such as illustrating travel and history lessons. They are, in fact, panoramas in little.

The drawing shows a typical scene to be so treated. It is, in fact, a reproduction from a photograph taken by the writer in Holland last year, but in every magazine you will find suitable pictures, and there is no point in giving a large, full-size one, here.


Having got a picture (which should not be too small, or contain too much small detail) to your liking, divide it into about six "planes," i.e. judge which objects are nearest to you, and which are the farthest away. For the sake of illustration we will refer to the Dutch scene here shown. The farthest plane is that of the clouds and buildings on the skyline. (The buildings on the skyline might well be in a separate plane but this would



*An example of a completed picture*

of all we have the man and the dog. All pictures can be so analysed.

We therefore draw the farthest plane on a sheet of plywood, leaving sufficient margin for some moulding to be later described. The steamer is cut out of fairly thin ply, and the fishing boat out of ply a little thicker, and so we cut out all the parts.

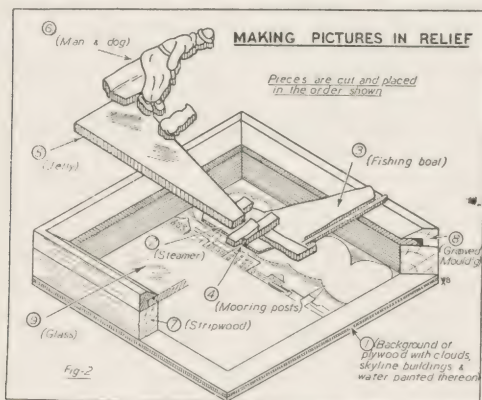

*How the parts are built up*

make the design too complicated for beginners).

Next comes the steamer, then the fishing boat, whilst nearer still are the mooring piles. Right in the foreground we have the jetty, and nearest

## Mounting the Parts

These are then mounted in their right order and position. It is not always possible to mount the pieces flat, owing to irregular pieces underneath. In this case suitable small packing pieces should be used.

Square edges should now be rounded off (except in cases where the objects are supposed to have square edges, as, for example, in the jetty). A gouge may be used with great effect in hollowing out some parts (the sail of the fishing boat, for instance), whilst plastic wood is useful for moulding small details and smoothing out square corners.

The whole must be framed, and the grooved moulding to take the glass mounted on a stripwood packing the height of which will depend on the thickness of the picture. This moulding should be temporarily fastened whilst the frame is cleaned up, and then taken apart so the picture can be coloured (with various enamels, oil-paints or poster colours). The whole is then reassembled.

## Fretwork Plaque—(Continued from opposite page)

drill bit and work it rapidly on the metal. Do not press too hard on the top of the drill or you will either break the drill point or else press out the actual metal.

Do not attempt to hammer the nails through straight away, or you will make a nasty dent. Two of these pins should be sufficient, one on each side, but of course, if the metal happens to bend, then four can be put in, one at the top, one at the bottom, and one at each side.

The completed plaque can be left with the wood in its natural state, or stained and polished in the usual way, a fine brush being used to apply the colour and polish to the fretwood edges.

If the backing is being put on, finish the stain and polish before this is done. The backing itself can be of cloth or fancy paper, or leatherette paper or even a piece of thin fancy wood which will bring the fretwork portion out in strong relief.



# MISCELLANEOUS ADVERTISEMENTS

The advertisements are inserted at the rate of 2d. per word prepaid. Name and address are counted, but initials or groups, such as E.P.S. or £1/11/6 are accepted as one word. Postal Order and Stamps must accompany the order. They will be inserted in the earliest issue. To sell anything except fretwork goods or those shown in Hobbies Handbook. Orders can be sent either to Hobbies Weekly, Advertisement Dept. 30/32 Ludgate Hill, London, E.C.4, or Dereham, Norfolk.

**L**ONELY? Then write Secy., U.C.C., 16BP. Cambridge Street, London, S.W.1. Genuine. Established 1905.

**B**OYS! There's a load of fun and instruction in every Hobbies Chemistry Set. You learn while you play. Prices from 3/-—Hobbies Ltd., Dereham.

## "MENDINE."

**M**ENDS Everything. A liquid glue cement in tubes, 2d., 4½d., 8d., from all Stores. If unobtainable, write Mendine, 123 Borough, S.E.1.

**L**ATHE AND FRETSAW 90/- carriage forward. Treadle-driven and just the thing for the home handyman. Write for details.—Hobbies Ltd., Dereham.

**6/-** IN THE £ COMMISSION. Xmas Club Agent Wanted.—Garratt, Stockley Street, Northampton.

**W**HY NOT TREAT YOURSELF to a fretmachine? It will double your output in half the time. Prices from 30/- cash or easy payments.—Hobbies Ltd., Dereham.

**I**NVENTIONS PROTECTED. Booklets gratis.—Reginald W. Barker & Co., Patent Agents, 56 Ludgate Hill, E.C.4.

**G**LUCE. Hobbies glue is as good as 25 years' experience can make it. Sticks wood, china, leather, etc. In tubes 6d. and 2d.—Hobbies Ltd., Dereham.

**E**XCELLENT Money-making Opportunities constantly occurring. Strongly recommended. Send stamped addressed envelope for free particulars.—Messrs. Green, 17 Church-lane, Hull, England.

**A**LL stamp collectors should read the "Stamp Collectors' Fortnightly," Editor Fred J. Melville, for interesting and authentic articles and latest news. Annual subscription 5/-, or 2d. fortnightly from your newsgent. Specimen from—"S.C.F." 44 Bedford Row, W.C.1.

**T**HE WORLD'S MOST POPULAR FRETWORK SET—Hobbies A1, price 10/6; post 9d. Other sets from 1/6 to 20/-. Send for list.—Hobbies Ltd., Dereham.

**S**PECIALY SELECTED STAMPS ONLY, sent out to applicants asking for my First Class approvals. Good Discount. Postage 1½d.—William Stokes, 8, Alfred Street, London, N.1.

**P**OLISH OUTFIT 2/3; post 6d. Comprises three kinds of stain crystals, woodfiller, cotton-wool rubber, bottle of Hobbies "Lightning" polish, glasspaper and instructions.—Hobbies Ltd., Dereham.

**M**OVIES AT HOME. How to make your own Cinema Projector. Particulars free.—Moviescope (H), Pear Tree Green, Doddinghurst, Essex.

**F**RAME YOUR OWN PICTURES! We supply mitre blocks, cramps, mouldings, etc. Easy, fascinating work. Profitable, too —Hobbies Ltd., Dereham.

**I**T'S EASY TO ENLARGE DESIGNS, pictures, etc. up to eight times original size with Hobbies all-steel Pantograph. 4/6; post 6d.—Hobbies Ltd., Dereham.



**D**O YOU KNOW WOOD? Eight specimen pieces each about 3ins. square, marked for reference, 8d. post free.—Hobbies Ltd., Dereham.

## 1/6 Buys This Ball-Race Turntable...

No longer need you pay a high price for a ball-race turntable. This one is engineer-made and costs only eighteen pence! A heavier model (for revolving display stands in shop windows) costs only 8/6. Gear wheels are also supplied as shown. Ask to see a Turntable at any Hobbies Branch.

### GEAR WHEELS


3½ins. dia. to fit small turntable. 17 holes. Made from hard brass. ½in. thick. Machine cut teeth. Price 1/-, Postage 2d. Gear wheel to fit large turntable 5½ins dia. 41 holes. Price 2/9. Postage 3d.



Smooth in action. 45 hardened steel balls. 2½ins. square. 5-hole size. To carry 56lbs. Price 1/6. Postage 3d. HEAVIER MODEL. 5½ins. diameter. 11-hole size. 80 steel balls. Guaranteed to carry 112lbs. Price 8/6. Postage 6d.

**Hobbies Ltd. Dereham & Branches**



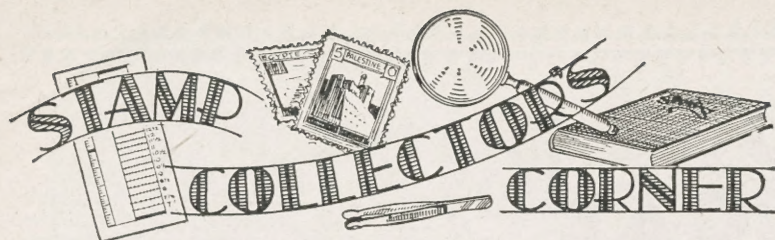

## INTERESTING NEW ISSUES

WE cannot possibly dismiss all the issues of the past month in one article unless we just state that such and such a country has made an issue of stamps. There are two sets at least which must have a fairly detailed account for they are both more than worthy of passing notice.

To start we illustrate one of a

and the child to one side and to bring in the figure of an old man playing the violin. All is enclosed in a semi-circular frame, and the old man playing almost leads one to imagine the mother is singing.

Next we have the French Colonial Issue in sets of six stamps. One could not call them anything but curious for they are so terribly

and this month we have a set of nineteen stamps nine of these being a very worthy addition to any zoo collection. Those readers who make such a collection should make a complete reference to a good natural history when they mount and write up this lot.

The one cent shows a picture of a giraffe, and stamps on which this animal is portrayed are always very popular. Although a giraffe attains a height of 18ft., yet the number of vertebrae is exactly the same as other animals—namely five. Since the tongue can give another eight inches in length there is little wonder that the giraffe can reach the juicy shoots at the top of the tree.

Despite their size they can run quite fast, up to 30 miles per hour.

The next specimen in this set which has a zoological subject is the 20 cents. On this we see the zebra. Although we have not seen these animals on the stamps of Mozambique yet they have appeared on the stamps of Nyassa, which is another Portuguese Colony.

The zebra, lives in herds of from 20 to 100 animals and its chief enemy is the lion. In captivity it can live for as long as twenty years, is tamed easily, and can be used for riding and driving. Unfortunately they are rather slow as draught animals.

Now we have four triangular stamps. The thirty cents shows a picture of a python, one of the constrictor family of snakes. These



Denmark Silver Jubilee



The Giraffe



The Zebra

set of four from Denmark, issued in commemoration of the Silver Jubilee of King Christian X. who came to the throne on May 14th, 1912. The values of the stamps are 5, 10, 15 and 30 ore and are in three designs. The ten and the thirty ore are as illustrated, and you should notice the initial C with a x in it both below a crown. The five ore shows a nice picture of a sailing yacht. The 15 ore however is not a very pleasing design as it has a large statue of a mounted figure, and a building as a background.

Belgium, has issued another very pleasing picture to add to her already large portrait gallery. This is a picture of the late Queen Astrid holding up the young Prince Baudouin. The set of eight stamps is again in aid of charity, the premium varying from 5c. to 1fr. 55c. on postage rates varying from 10c. to 2fr. 45c.

Czechoslovakia has also brought out some fresh designs. One stamp bears a portrait of Dr. Edvard Benes, while three Child Welfare Charity stamps have rather more unusual designs. The two lower values show a mother with her baby at the side of the cot, while the highest value is decidedly attractive, although it is in part very similar to the lower values.

All that has been done is to place the figures of the mother

muddled. For instance, one value has a picture of three different types of native heads. Then in the background is the Eiffel Tower and another building, on top the words 'Exposition Internationale Paris, 1937,' and at the bottom the name of the Colony.

There are over 100 different stamps for all the colonies, six designs covering the lot.—It is somewhat after the style of our Coronation stamps—that is, one design doing for a number of places.

French Equatorial Africa has a new set also but again the designs are not very interesting, with the exception of one of them, which shows a native logging. This certainly conveys an idea of conditions of life in the country from which the stamps come.

The Dutch Indies have issued two "Scout Stamps," and scouts can certainly feel they are having their full share of the stamp album now.

Well, now we can get to the two sets which are absolutely brimming over with interest and for which space in the illustrations has purposely been allowed. One would like to illustrate some of the above but patience had to be exercised and space left for these.

Mozambique Company have already had a very attractive, if somewhat long, set showing native products. That was in 1918-1924,



A Python Triangular

snakes are fond of the water and will live in it and soak for days on end. True pythons almost all lay leathery shelled eggs, and exhibit some degree of parental care.

(To be continued)



# HOBBIES ELECTRICAL OUTFITS

Boys ! Learn by doing—the new fascinating way—with a Hobbies Electrical Outfit. Hours of fun and absorbing interest, conducting experiments with the apparatus provided and the step-by-step instruction book. No shocks ! You use only a standard pocket flash-lamp battery. Dad and Mum can join in, too, when you demonstrate the “shocking” coil. Get an Outfit NOW—but be sure it is Hobbies.

*This is the age of electricity. Radios, Telephones, Refrigerators, and Vacuum Cleaners are found in almost every modern home. Learn the “why” and “how” of electricity with a Hobbies Electrical Outfit. It opens the door to a pastime of absorbing interest and fascination.*

## Hundreds of Experiments

The modern boy, with a Hobbies Electrical Outfit, has almost unlimited opportunities for finding out for himself the why and how of electricity. And how much better to learn while doing, than swotting over “dry as dust” technical books !

## Amazing Value

Choose from four Outfits. The one shown is 12/6—and it's a beauty, with its motor and induction coil, and a host of other apparatus. Remember, Hobbies Electrical Outfits are extra good value. No elaborate box or packing to pay for—the value is in the contents.

**3/- 5/- 7/6 12/6**

Postage 6d.

*You can buy Hobbies Electrical Outfits from Hobbies own Branches in London, Glasgow, Manchester, Birmingham, Sheffield, Leeds, Southampton and Hull. Or you can order by post from Hobbies Limited, Dereham, Norfolk.*



## Fun... Fascination Thrills Galore



# HOBBIES

BRANCHES AND AGENCIES. LTD.

Below are the addresses where Hobbies goods can be purchased. In addition, all leading stores and ironmongers stock or can obtain your requirements in fretwork and woodwork, designs, wood, turned legs, moulding, polish, etc.

## HOBBIES OWN BRANCHES—

LONDON - - - 16 NEW OXFORD STREET, W.C.1.  
LONDON - - - 147 BISHOPSGATE, E.C.  
LONDON - - - 83 NEWINGTON BUTTS, S.E.11.  
GLASGOW - - - 326 ARGYLE STREET.  
MANCHESTER - - - 10 PICCADILLY.  
BIRMINGHAM - - - 9a HIGH STREET.  
SHEFFIELD - - - 4 ST. PAUL'S PARADE.  
LEEDS - - - 10 QUEEN VICTORIA STREET.  
SOUTHAMPTON - - - 25 BERNARD STREET.  
HULL - - - 13 PROSPECT STREET.  
CANADA

54 WELLINGTON STREET WEST, TORONTO.

## HOBBIES AGENCIES—

Aberdeen.—Jas. Mutch, Ltd., 47 Broad Street; Blackburn.—Mr. H. Mercer, 68 Darwen Street; Bradford.—Messrs. T. Underwood & Co., 13 and 15 Manchester Road; Cambridge.—Mr. H. S. Driver, 28 Hills Road; Canterbury.—Mr. T. D. Goodman, 83 Burgate Street and 16 St. George's Street; Cardiff.—John Hall (Tools) Ltd., 22 and 24 Morgan Arcade; Croydon.—L. H. Turtle, Ltd., 6 Crown Hill; Dover.—Mr. E. F. Bockham, Queen's Gardens; Dublin.—Mr. J. J. McQuillan, 86 Capel Street; Dundee.—Phins Ltd., 29 Nethergate; Folkestone.—Mr. W. H. Allsworth, 16 and 18 Guildhall Street; Hastings.—Mr. W. H. Mozley, 4 York Buildings; Leicester.—Mr. Frank Berry, 8 Loseby Lane; Liverpool.—Mr. C. Lucas, 17 Houghton Street; London.—Messrs. H. Osman, 166 Aldersgate Street, E.C.; Newport, Mon.—John Hall (Tools) Ltd., 81 High Street; Reading.—Mr. W. J. Sargent, 44 West Street; Swansea.—John Hall (Tools) Ltd., 8 Gower Street; York.—Messrs. J. H. Shouksmith & Sons, 182 Micklegate.

HEAD OFFICE AND WORKS:

**DEREHAM, NORFOLK**

## GENERAL NOTICES.

### EDITORIAL.

All Editorial matter should be sent to The Editor, Hobbies Weekly, Dereham, Norfolk. If enclosed with orders or other matter for Hobbies Ltd., it should be written on a separate sheet of paper. Any matter requiring an answer must have a stamped addressed envelope enclosed.

### DESIGN SHEETS.

The presentation Design Sheet is given only with current copies of Hobbies Weekly, and not with back numbers. The designs, however, can be obtained separately, from Hobbies Ltd., price 4½d., post free, or 10d. in the case of double size sheets.

### ADVERTISEMENTS.

All orders and letters respecting advertisements should be addressed either to the Advertisement Manager, Hobbies Weekly, Dereham, Norfolk, or to 30/32, Ludgate Hill, London, E.C.4.

### INDEXES AND BINDING CASES.

An Index for any volume is obtainable for 4½d. post free, and Binding Cases to take a complete set of 26 issues (making the volume) are supplied for 1/6, or sent post free for 1/8. The Cases are in red linen with gold blocked name on the front. The Azabook Binder, to hold 24 copies which you can fix in yourself is 3/3 (3/6 post free) including two dozen fastening staples.

### BACK COPIES.

Back copies are obtainable from the Editorial address given above or from the Publisher, price 2d. a copy, plus postage.


### CONTRIBUTIONS.

The Editor is always pleased to consider suitable articles for these pages, which, if accepted, will be paid for at the usual rates. While every effort will be made to return unsuitable contributions (if stamps for that purpose are sent with them), the Editor does not accept any responsibility for their loss.

### SUBSCRIPTION.

Hobbies will be forwarded by post to any part of the world at the following prepaid rates. Twelve months 13/-, six months 6/6, three months 3/3. Registered for transmission by Canadian Magazine Post

## Ivoryine & Xylonite



This material is particularly suitable for fine work in miniature, for overlays, monograms, etc. It is a composition with a beautiful flat glossy surface, easily cut with the fretsaw, being only about 1/16 in. thick.

In Sheets 12ins. by 6ins.  
IVORINE (White) 1/6 per Sheet  
XYLONITE (Black) 1/3 " "

Postage 2d. extra

Buy from any Hobbies Branch or Agent or direct from:—  
**HOBBIES Ltd., DEREHAM, NORFOLK**

## 2/3 Buys This Polish Outfit

No longer need you envy the professional french polish finish....You can get it yourself with Hobbies Lightning Polish! This Outfit gives you all you need.



Postage 6d. from  
Hobbies Limited,  
Dereham.

## MODEL TYRES

Well made in actual rubber and exactly like the real thing  
To fit 2 in. diameter wheels.  
Price 4d.



From any Hobbies Agent or Branch. By post (1½d. extra,) from Hobbies Ltd., Dereham, Norfolk.

## REPLY COUPON

One of these small Coupons and a stamp for 1½d. must be attached to your letter to the Editor, if you are enquiring about anything which demands an answer. Cut the Coupon out and put it in with your letter which should be addressed to The Editor, Hobbies Weekly, Dereham, Norfolk





# MODERN FRETWORK

*will interest  
Dad and you*

## Any handyman can make them

The articles shown below are made from full-size patterns on large design charts. Except where shown, these charts are 4d. each (postage 1d.), and the wood and fittings are supplied complete for the making. The legs are ready turned.

### A SMALL STAND

Stands 2ft. 6ins. high—Design No. 1806. Built in Oak, turned legs supplied—Complete parcel 12/6. (Postage 1s.)

### A BOOK REST

Length 14ins. Design No. 1715. Built in Mahogany. Complete parcel of planed boards 3/-. (Postage 9d.)

### A SLIPPER BOX

Height 15ins. Design No. 1781. In Oak. Grooved legs and corner posts supplied. Price 15/-. Post 1/-.

### A MANTEL CLOCK

An 8-day clock in mahogany Design No. 1013. Wood complete 2/6. Clock movement 12/6. (Postage 6d.)

### AN UMBRELLA STAND

Stands 2ft. 8ins. high. Design 178 Special (Price 9d.) In Oak. Parcel of wood 13/11 complete. (Carr. For.)

### A DRAUGHTS BOX

Draughts board which shuts as a box. In Mahogany and Padouk. Parcel of wood, etc., 4/3. (Postage 9d.) (Design No. 664.)

### A DOLL'S HOUSE

Stands 16ins. high 20ins. wide. Design 157 Special (9d.) Woods, pillars windows etc. Complete 9/4. (Post 1/-)

*Hundreds of other similar designs and free charts worth 1/6 are given with the Hobbies Handbook, 268 pages. 20 different pastimes. Price 6d. of any newsagent.*

*All Hobbies goods are obtainable from leading ironmongers and stores, or Hobbies Branches in London, Glasgow, Manchester, Birmingham, Sheffield, Leeds, Southampton, Hull.*

